

DELUXE GAS FIREPLACE INSERTS



NEVER BE COLD AGAIN!



The Right Fireplace Insert Company For You

"For more than forty years, we have been passionate about the science and art behind making beautiful fireplace inserts for homes in North America. We utilize the finest materials and subject them to vigorous testing standards to make fireplace inserts that stand up to the rigors of time.

These fireplace inserts are the best money can buy. We have a worldwide reputation for award-winning innovations in fireplace insert design, and yet the most significant recognition to me is when a family entrusts us to be their fireplace insert of choice.

Take your time, enjoy looking through this catalog and keep the home fires burning."



A stylized, handwritten signature in black ink, reading "Kurt W. F. Rumens".

Kurt W. F. Rumens,
President & Director of Product Design
Travis Industries, House of Fire



All Fireplace Inserts Are Not Created Equal

There are a lot of nice fireplace inserts out there that you might like. Allow us to introduce you to the greatest gas inserts in the world. We know you'll find one that you are going to love!

Lopi® offers four extraordinary models of premium gas burning fireplace inserts. While every one of these fireplace inserts embody the same attention to detail in design and construction, each model is quite unique. Sizing and heating capacity range from medium to large heaters.

Beauty Is Not Optional

We make the most beautiful, elegant fireplace inserts in the world. Our models feature a wide array of designer faces and firebacks to choose from, along with high definition log set options. Our attention to detail is second to none and our gas inserts provide the most realistic, wood-like fires available. When you purchase a Lopi®, you are not only getting an efficient heater, but a stunning statement piece for your home.

Incredible Performance

All of our insert models are excellent home heaters designed to provide radiant heat through the large fireviewing glass and natural convection through the heat exchanger. Incredible turndown rates and high efficiencies make these some of the most efficient gas burning inserts in the world.

No Power? No Problem!

All Lopi® fireplace inserts will work in a power outage.

Innovations

We are known the world over to be the most creative group of innovators and designers, bringing life to innovations such as:

- Ember-Fyre® & Ember-Fyre® II
- Ember-Glo™
- GreenSmart®
- Custom Shop Collection

MID-SIZED FIREPLACE INSERT PAGES 6-9



32 DVS DELUXE

The 32 DVS has the smallest footprint of our mid-sized models, and is our 'go-to' insert for fitting into almost any fireplace. This Deluxe model features the award-winning Ember-Fyre® Burner.

31,000 BTUs



430 DELUXE

This Deluxe model features a large ceramic glass viewing area that extends down to the hearth. The 430 also comes standard with Ember-Glo™ ember bed lighting.

31,000 BTUs

LARGE FIREPLACE INSERTS - PAGES 10-13



34 DVL DELUXE

This model is the larger counterpart to the 32 DVS, which also includes our Deluxe features and the award-winning Ember-Fyre® Burner.

40,000 BTUs



616 DELUXE

The 616 features our biggest fireview, with up to 20% more glass than other large inserts its size. This Deluxe model features Ember-Glo™ ember bed lighting.

39,000 BTUs

NOTE: "Deluxe" insert models include the GreenSmart® Remote Control, quiet Convection Fan and Accent Lights.



The 32 DVS Deluxe and 34 DVL Deluxe Feature the Award-Winning Ember-Fyre® Burner

You'll be amazed at the realism of our patented Ember-Fyre® burner technology. Known for its gorgeous, dancing yellow flames and high-definition detailed logs, Ember-Fyre® is the most realistic wood-like gas fire available.

Ember-Fyre® Protected By U.S. Patent #6,602,068, #6,443,726 and other patents pending.

The 430 Deluxe and 616 Deluxe Feature the New Ember-Fyre® II Burner

Inspired by our popular award-winning Ember-Fyre® Burner, the new Ember-Fyre® II offers the next generation of high definition, wood-like burner technology. Just like our original Ember-Fyre® Burner, Ember-Fyre® II provides a realistic looking fire with dancing yellow flames and incredible attention to detail that makes it hard to distinguish from a wood burning fire. Ember-Fyre® II includes Ember-Glo™ ember bed lighting and your choice of highly detailed log sets or Fyre-Art™.

AN INSERT FOR EVERY FIREPLACE




Turn Your Fireplace Into An Efficient Heat Source

Lopi® gas inserts allow you to enjoy a gorgeous, glowing fire without losing heat out of your chimney. These inserts are designed to transform virtually any masonry or zero clearance (metal) fireplace into an efficient source of heat. Traditional, open fireplaces can have efficiency ratings as low as 15%, and depending on the condition, can actually draw the heat out of your home for a net heat loss. Our heater-rated gas inserts achieve steady state efficiency ratings as high as 90%.

All Lopi® Gas Inserts Feature Direct Venting

All Lopi® Premium Gas Inserts feature an efficient co-linear direct venting system. This dual-liner system allows for direct venting through an existing masonry chimney with one liner to vent exhaust and the other liner to provide combustion air and maintain indoor air quality.

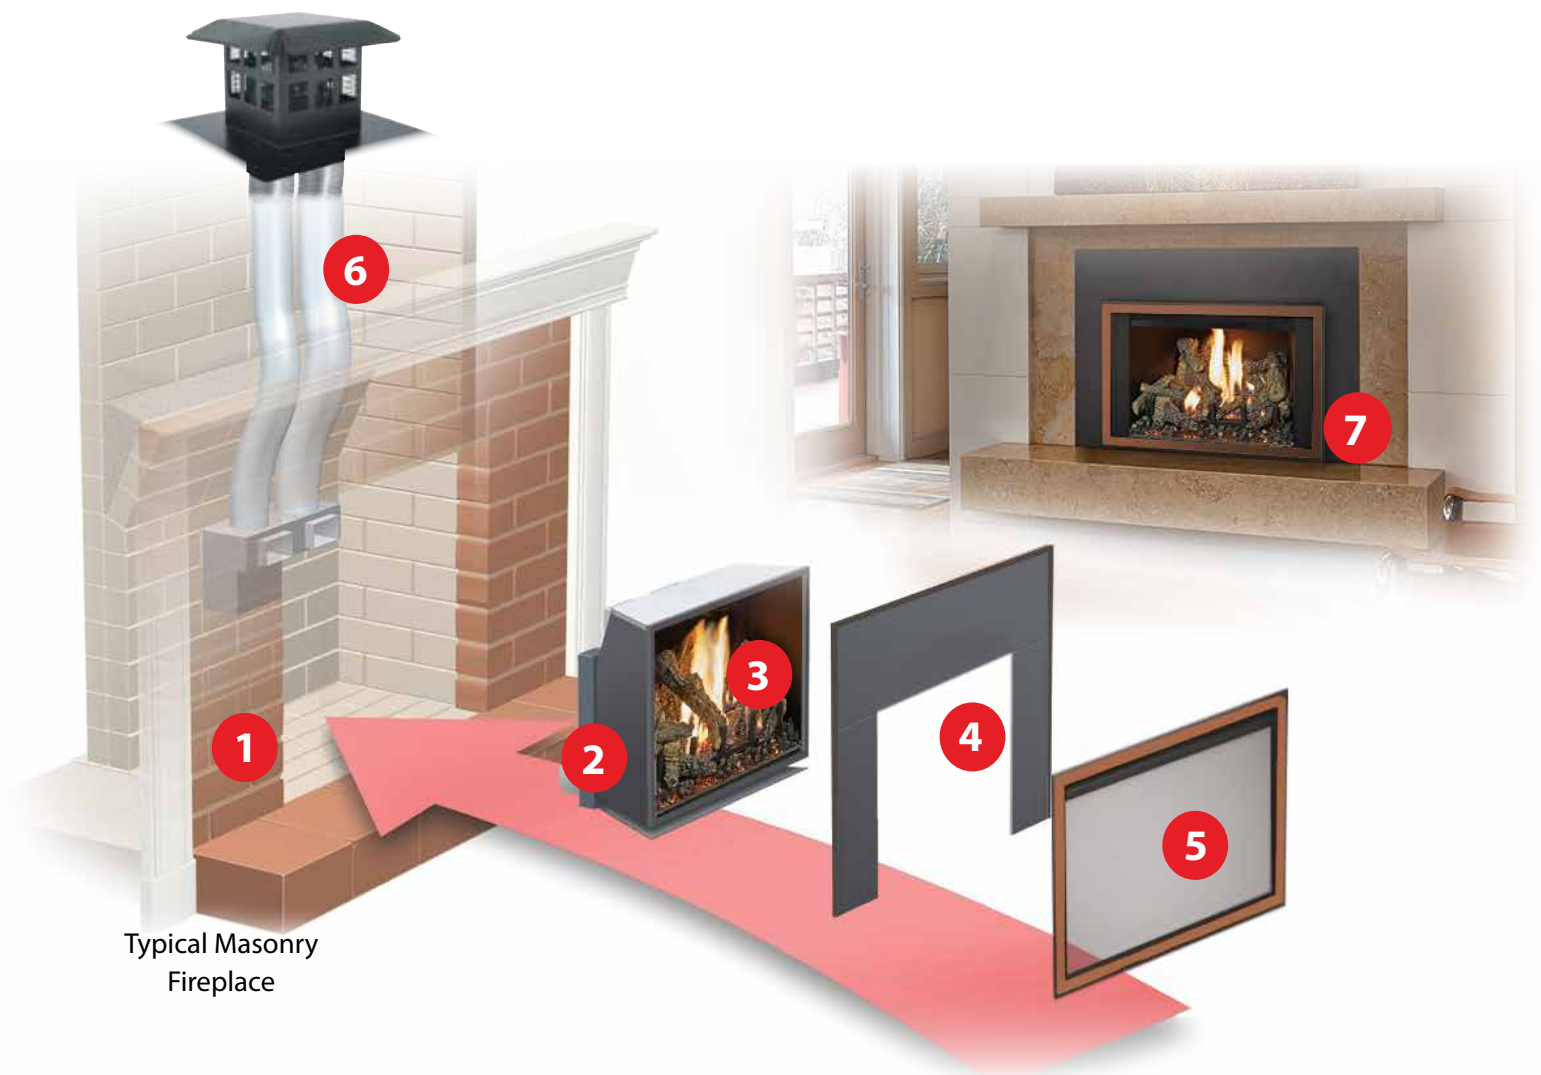

1

Measure Your Existing
Masonry or Metal
(Zero Clearance)
Fireplace

2

Select the Insert
That Best Fits Your
Fireplace

3

Choose
A Log Set
and Burner

4

Select
A Finish
Panel
(Required on
430 and 616)

5

Pick One of
the Designer
Faces

6

Add the
Co-Linear
Direct Vent
Chimney

7

Enjoy
the Heat!



32 DVS shown with Black Painted
Times Square™ Face,
Driftwood Fyre-Art™ and
Black Glass Fireback

32 DVS DELUXE



Traditional 1,500 Square Foot Heater

This insert is an efficient way to heat mid-sized homes and living spaces up to 1,500 square feet. The 32 DVS features a ceramic glass viewing area and our award-winning Ember-Fyre® Burner with a high definition detailed log set.

This Deluxe model includes our most popular options, namely, adjustable rear Accent Lights, a 180 CFM convection fan and the GreenSmart® Remote Control. Learn more about our exciting GreenSmart® features on page 18.

Insert Choices *See Pages 14-17*

- Seven face designs to choose from
- Choose between the Award-Winning Ember-Fyre® Burner with high definition log set or the Dancing-Fyre™ Burner with choice of Classic Log Set, Driftwood Fyre-Art™ or Fyre-Stone™ Rock Kit
- Multiple Finish Panels to choose from. Custom fit panels are also available. (See page 15 for sizes)
- Four fireback choices (*Not all firebacks are available with Driftwood Fyre-Art™ or Fyre-Stone™ Rock Kit*)
- Insert Wiring Kit

Specifications


Heating Capacity:	Up to 1,500 Square Feet
Maximum BTU/HR Input:	31,000 (NG/LP)
Minimum BTU/HR Input:	10,700 (NG) 12,600 (LP)
Steady State Efficiency:	Up To 88.77% (NG), 90.13% (LP)
P4 Canadian Efficiency:	76.17% (NG), 78.05% (LP)
Dimensions:	19-1/2" H, 26-1/2" W (Front), 18" W (Back), 15-1/8" D
Glass Viewing Area:	25-3/8" W x 13-7/8" H (352-1/2 Sq. In.)



FEATURING EMBER-FYRE® TECHNOLOGY

It's the most realistic gas fire available - so real, that Popular Science® magazine awarded the Ember-Fyre® burner one of its top 100 innovations of the year!

Clearances To Combustibles & Hearth Protection

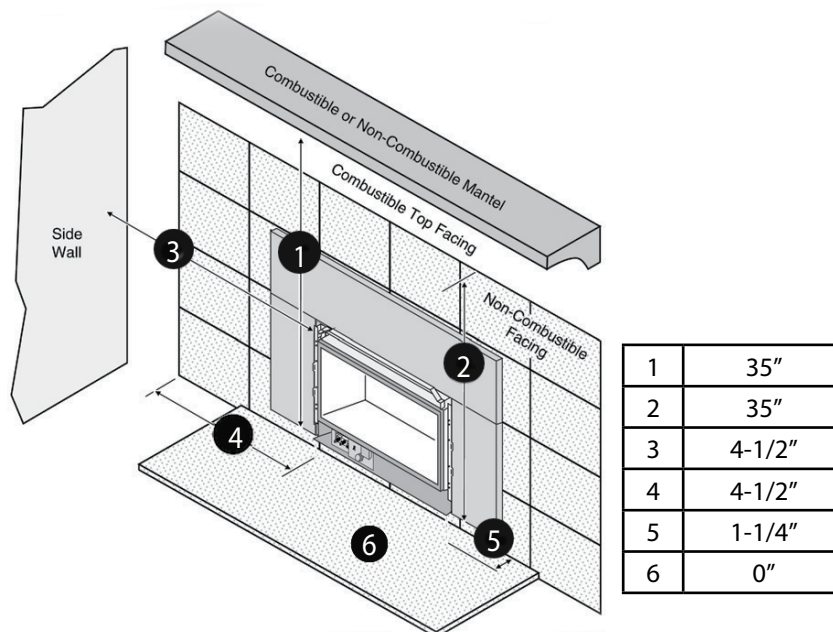



430 shown with Wilmington
Carbon Patina Face,
Classic Oak Log Set and
Handmade Brick Fireback

430 DELUXE



9

Traditional 1,500 Square Foot Heater with Large Viewing Area

The 430 is a beautiful insert that is ideal for providing supplemental heat to homes or living spaces up to 1,500 square feet. Featuring 430 square inches of ceramic glass, this model has a larger fireview than most inserts its size. The ceramic glass extends down to the hearth to offer a "clean face" look that resembles a traditional masonry fireplace. This model features the Ember-Fyre™ II burner with Ember-Glo™ ember bed lighting.

This Deluxe insert features the GreenSmart® Remote Control, top Accent Light and a 180 CFM convection fan. Learn more about our exciting GreenSmart® features on page 18.

Insert Choices *See Pages 14-17*

- Six face designs to choose from
- Choose between Classic Oak or Birch Log Sets, or Driftwood Fyre-Art™
- Five Fireback choices
- Multiple Finish Panels to choose from. Custom fit panels are also available. (See page 15 for sizes)
- Insert Wiring Kit


Specifications

Heating Capacity:	Up to 1,500 Sq. Ft.
Maximum BTU/HR Input:	31,000 (NG/LP)
Minimum BTU/HR Input:	9,900 (NG), 7,500 (LP)
Steady State Efficiency (High):	Up To 85.55% (NG), 86.50% (LP)
P4 Canadian Efficiency:	73.77% (NG), 74.73% (LP)
Dimensions:	20-1/4" H, 30-1/2" W (Front), 21" W (Back), 15-1/2" D
Glass Viewing Area:	24-3/8" W x 17-5/8" H (430 Sq. In.)



MID-SIZED GAS INSERTS

Clearances To Combustibles & Hearth Protection

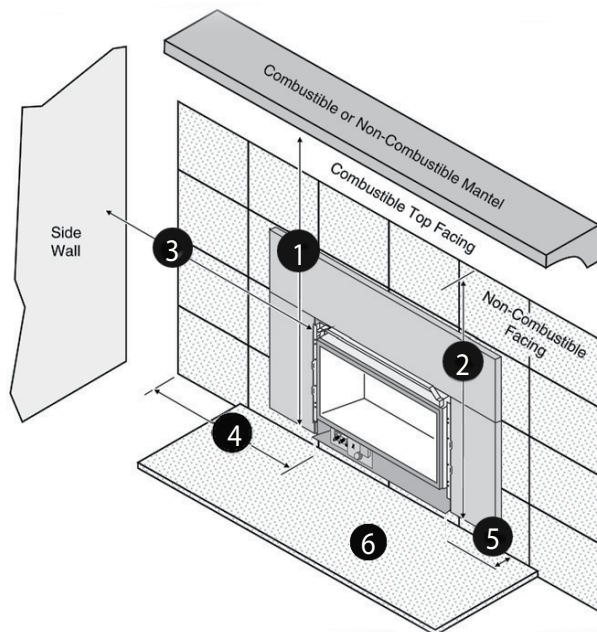

1	34-1/2" = 12" Mantle Depth 33-1/2" = 4" Mantle Depth
2	32-3/8"
3	5"
4	3-3/8"
5	1-1/4"
6	0"



34 DVL shown with Stainless Steel Profile™ Face, Ember-Fyre® Burner with High Definition Log Set and Handmade Brick Fireback

34 DVL DELUXE



Traditional 2,000 Square Foot Heater

The 34 DVL is our most popular gas insert and can heat up to 2,000 square feet. This model has a generous ceramic glass viewing area while featuring our award-winning Ember-Fyre® Burner and high definition detailed log set.

The 34 DVL is a Deluxe model that features the GreenSmart® Remote Control, adjustable rear and top Accent Lights, and a 180 CFM convection fan. Learn more about our exciting GreenSmart® features on page 18.

Insert Options *See Pages 14 -17*

- Seven face designs to choose from (See page 14)
- Choose between the Award-Winning Ember-Fyre® Burner with high definition log set or the Dancing-Fyre™ Burner with choice of Classic Log Set, Driftwood Fyre-Art™ or Fyre-Stone™ Rock Kit
- Multiple Finish Panels to choose from. Custom fit panels are also available. (See page 15 for sizes)
- Five fireback choices (Not all firebacks are available with Driftwood Fyre-Art™ or Fyre-Stone™ Rock Kit)
- Insert Wiring Kit

Specifications


Heating Capacity:	Up to 2,000 Square Feet
Maximum BTU/HR Input:	40,000 (NG/LP)
Minimum BTU/HR Input:	11,900 (NG) 7,400 (LP)
Steady State Efficiency (High):	Up To 86.95% (NG), 88.39% (LP)
P4 Canadian Efficiency:	75.21% (NG), 76.01% (LP)
Dimensions:	23-3/4" H, 31-1/2" W (Front), 20" W (Back), 14-1/2" D
Glass Viewing Area:	29" W x 18"H (522 Sq. In.)



FEATURING EMBER-FYRE® TECHNOLOGY

It's the most realistic gas fire available - so real, that Popular Science® magazine awarded the Ember-Fyre® burner one of its top 100 innovations of the year!

Clearances To Combustibles & Hearth Protection

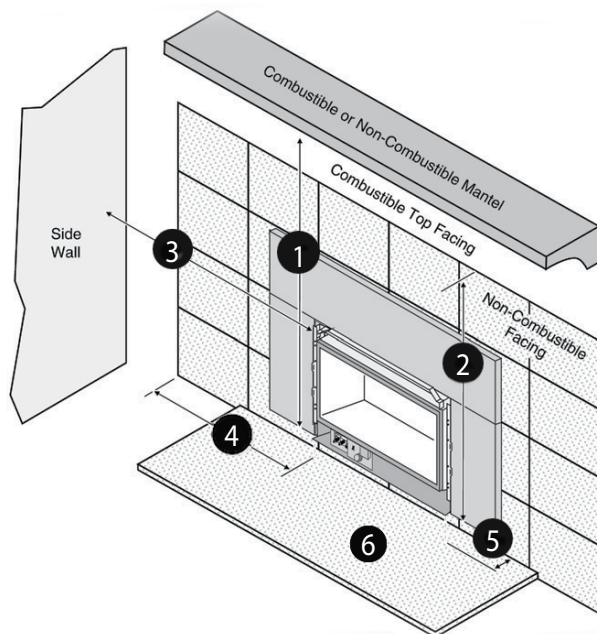

1	35-1/2"
2	35-1/2"
3	4"
4	4"
5	1-1/4"
6	0"



616 shown with
*Times Square™ Face, Birch Log
Set and Ledgestone Fireback*

616 DELUXE

Traditional 2,000 Square Foot Heater with Large Viewing Area

The 616 is an excellent heater and beautiful focal point for larger homes and grand spaces up to 2,000 square feet. This insert features our biggest fireview, with 616 square inches of ceramic glass that extends down to the hearth. This creates a "clean face" look with minimal metal facing and a larger fireview than other inserts its size. This model has a gorgeous flame appearance and features the Ember-Fyre™ II burner with Ember-Glo™ ember bed lighting.

This Deluxe insert features the GreenSmart® Remote Control, top Accent Light and a 180 CFM convection fan. Learn more about our exciting GreenSmart® features on page 18.

Insert Choices *See Pages 14-17*


- Six face designs to choose from
- Choose between Classic Oak or Birch Log Sets, or Driftwood Fyre-Art™
- Five Fireback choices
- Multiple Finish Panels to choose from. Custom fit panels are also available. (See page 15 for sizes)
- Insert Wiring Kit

Specifications

Heating Capacity:	Up to 2,000 Sq. Ft.
Maximum BTU/HR Input:	39,000 (NG/LP)
Minimum BTU/HR Input:	12,000 (NG) 9,000 (LP)
Steady State Efficiency (High):	Up To 83.88% (NG), 85.39% (LP)
P4 Canadian Efficiency:	71.19% (NG), 73.04% (LP)
Dimensions:	23-5/16" H, 34" W (Front), 24" W (Back), 16"D
Glass Viewing Area:	28-7/8" W x 21-3/8" H (616 Sq. In.)



Clearances To Combustibles & Hearth Protection

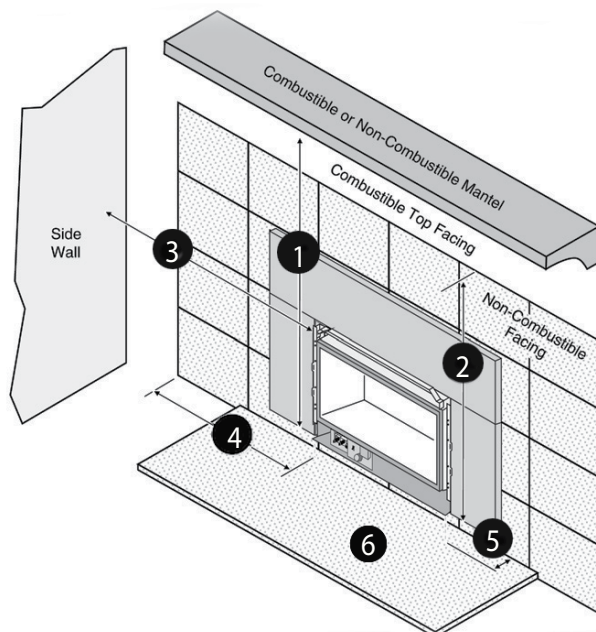

1	36-1/2" = 12" Mantle Depth 33" = 4" Mantle Depth
2	35-1/2"
3	6"
4	5"
5	1-1/4"
6	0"




FACE OPTIONS FOR ALL MODELS

NOTE: All face heights are measured from the bottom of the units to the top of the face.



32 DVS and 34 DVL
Face Design
Black Painted

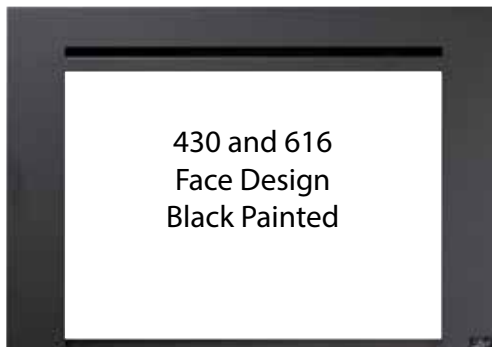

430 and 616
Face Design
Black Painted

TIMES SQUARE™ FACE

These faces require Finish Panels.

32 DVS - 30-3/8" W x 20-7/8" H


34 DVL - 34" W x 24-7/8" H

430 - 31-1/8" W x 22" H

616 - 35-1/2" W x 25-3/4" H



Black Painted

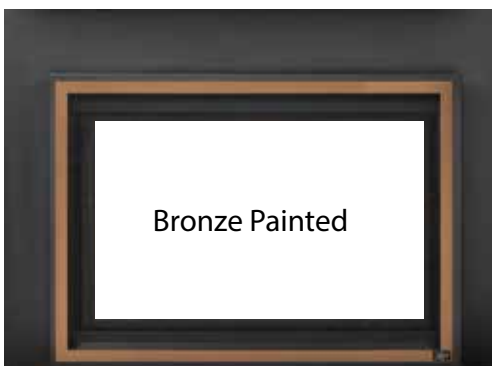

Bronze Painted



Stainless Steel

PROFILE™ FACES


Profile faces require Finish Panels as shown in photos.

32 DVS - 31-1/8" W x 20-1/2" H

430 - 31-1/8" W x 20-1/2" H

34 DVL - 34" W x 24-1/2" H

616 - 35-1/2" W x 24-1/4" H

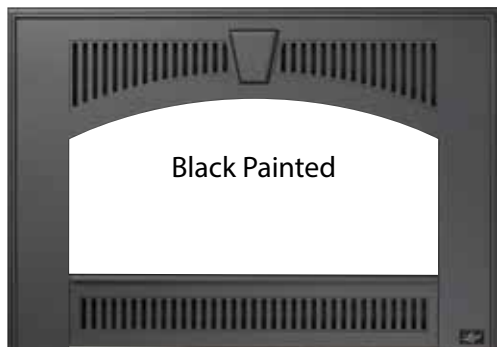

Black Painted



Hand-Rubbed
Carbon Patina


WILMINGTON FACES

These faces require Finish Panels.

32 DVS and 34 DVL Wilmington™ Face Design:

32 DVS - 32 1/4" W x 22 1/2" H

34 DVL - 36" W x 27" H

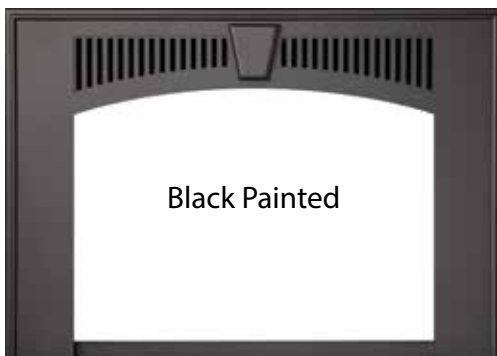

Black Painted



Hand-Rubbed
Carbon Patina

430 and 616 Wilmington™ Face Design:

430 - 31-1/8" W x 22" H

616 - 35-1/2" W x 25-3/4" H

32 DVS & 34 DVL FINISH PANELS

These panels are attached to the insert to accommodate the size variance between the insert face and the size of your existing fireplace opening.



UNIVERSAL FACE (DVS/DVL ONLY)

These faces do not require Finish Panels.

32 DVS


Small: 37-7/16" W x 23-1/8" H

Large: 40-3/8" W x 29" H

34 DVL

Small: 40-5/16" W x 27" H

Large: 44" W x 33 1/2" H

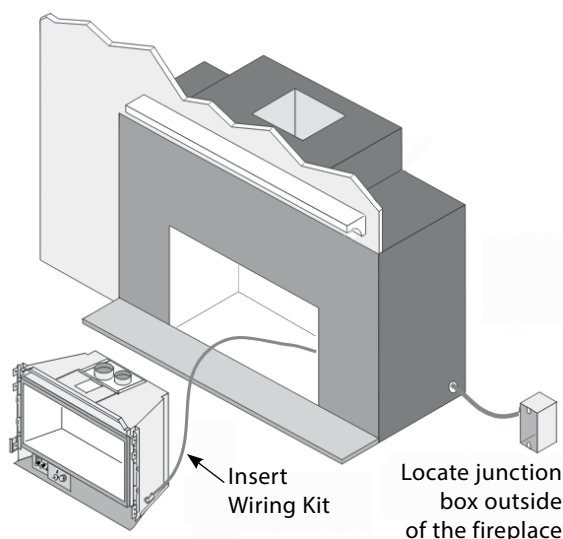

INSERT WIRING KIT

If you do not want the power cord running across your hearth, use our optional U.L. approved Insert Wiring Kit. This kit allows you to have a hard-wired electrical connection within your existing fireplace for a safe and cord free installation.

Available for all gas inserts.

MODEL 32 DVS

Three Piece Finish Panels With Trim

4" x 6" 37-1/8" W x 25" H

8" x 10" Arch 40-5/16" W x 28-7/8" H

10" x 13" 44-5/16" W x 31-7/8" H

One-Piece Finish Panels

Small 38" W x 25" H

Large 40" W x 28-1/2" H



Three-Piece Finish Panels

Top and two sides. Includes Black Trim

MODEL 34 DVL

Three-Piece Finish Panels With Trim

4" x 6" 40" W x 29" H

8" x 10" 44-3/16" W x 33-3/8" H

8" x 10" Arch 44-3/16" W x 33-3/8" H

10" x 13" 48-1/8" W x 36-3/8" H

One-Piece Finish Panels

Small 42" W x 30-1/2" H

Large 44" W x 34" H



One-Piece Finish Panels

Clean look with no seams. Includes Optional Black Trim available that can reduce depth into firebox by 1-1/4".

430 & 616 FINISH PANELS (REQUIRED)

Clean, one-piece panels are available for the 616 and 430 and come in two sizes. Optional Black Trim available that can reduce depth into firebox by 1-1/4".

MODEL 430

38" W x 25" H

40" W x 28-1/2" H

MODEL 616

42" W x 30-1/2" H

44" W x 34" H



Shown 4-Sided Custom Panel with 616 insert

CUSTOM FINISH PANELS

We also offer custom fit three-sided and four-sided finish panels to fit virtually any size fireplace opening. Ask your Lopi® dealer for details.

LOG SET AND MEDIA OPTIONS

Model 32 DVS Deluxe



32 DVS - Ember-Fyre® Burner With High Definition Log Set

Model 430 Deluxe



430 - Classic Oak Log Set

Model 34 DVL Deluxe



34 DVL - Ember-Fyre® Burner With High Definition Log Set



32 DVS - Dancing-Fyre™ Burner With Classic Log Set



430 - Birch Log Set



34 DVL - Dancing-Fyre™ Burner With Classic Log Set



32 DVS - Dancing-Fyre™ Burner With Driftwood Fyre-Art™ and Glass Media Options



430 - Driftwood Fyre-Art™



34 DVL - Dancing-Fyre™ Burner With Driftwood Fyre-Art™ and Glass Media Options



32 DVS - Dancing-Fyre™ Burner With Fyre-Stone™ Rock Kit and Glass Media Options



34 DVL - Dancing-Fyre™ Burner With Fyre-Stone™ Rock Kit and Glass Media Options

FIREBACK OPTIONS

Model 616 Deluxe



616 - Classic Oak Log Set



616 - Birch Log Set



616- Driftwood Fyre-Art™

Lopi® gas inserts include black painted interiors and a selection of transitional firebacks to customize the interior look of your insert and provide a striking background for the media and glowing flames. Firebacks are required on the 430 and 616 insert models.



Handmade Brick*



Herringbone Brick*
Common brick is on backside



Common Brick*
Herringbone brick is on backside



Ledgestone

Not available on 32 DVS, on 34 DVL must use Ember-Fyre® burner



Black Glass

**Handmade Brick, Herringbone Brick and Common Brick firebacks are not compatible with Driftwood Fyre-Art™ or Fyre-Stone™ Rock Kit on the 32 DVS and 34 DVL inserts*

GLASS MEDIA OPTIONS


For 32 DVS & 34 DVL when using
Fyre-Stone™ Rock Kit or
Driftwood Fyre-Art™




Platinum



Bronze

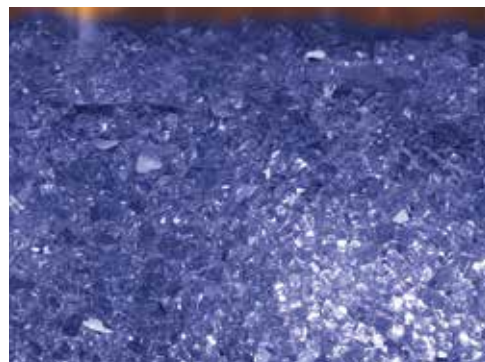

Cobalt

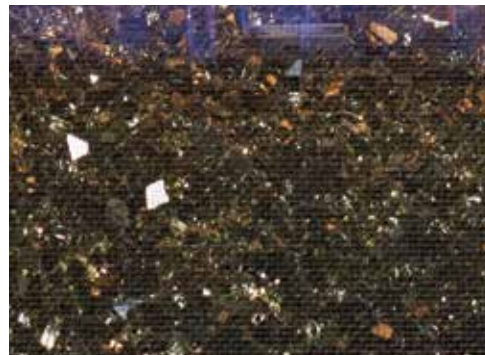

Black

All of our Deluxe Gas Fireplace Inserts feature the patented GreenSmart® System. This proprietary system is the most innovative collection of components, controls and technology that when combined provides an elegant, greener and smarter way to heat your home.

GREENSMART® WIRELESS REMOTE CONTROL

- Two Thermostat Modes
- Flame Adjustment (6 levels)
- Change Between GreenSmart® and CPI Pilot Modes
- Fan Operation (6 levels)
- Comfort Control™ (Controls rear burner)
- Accent Lights (6 levels)
- Ember-Glo™ on 430 and 616 models



MANUAL SETTING

ON/OFF, Fire and Fan stay where you manually set it.

THERMOSTAT SETTING

Insert turns ON or OFF to maintain your desired home/room temperature.

GREENSMART® THERMOSTAT SETTING

“GreenSmart® Thermostat Mode” automatically adjusts the flame height based on the temperature setting, so the flame will modulate up/down as opposed to shutting OFF/ON like normal thermostats. This setting conserves fuel and maximizes the fireplace inserts heating ability while extending the viewing pleasure of the fire.

CHOICE OF PILOT MODES

Easily Switch Between Pilot Modes:

GreenSmart® Mode

Use in Summer or milder heating days to reduce gas consumption from the Pilot.



CPI - Continuous Pilot Mode

Keeps the Pilot on at all times. This warms the vent system to maintain a strong draft in your chimney and reduce moisture condensation on the glass. Use in CPI mode in Fall/Winter or in cold climate areas.

The GreenSmart® system includes a battery back-up, ensuring proper ignition even during power outages.



FLAME ADJUSTMENT

Adjust the height/heat of the flame. 6 levels of flame heights to choose from.



CONVECTION FANS

Circulate room air around the firebox and deliver heated air into your home. 6 speeds to choose from.



COMFORT CONTROL™

Comfort Control turns off the rear burner while leaving the front burner on for an attractive flame when heat output is not the priority. This feature creates a turn-down ratio of up to 75 percent and offers a more efficient way to heat your home by only burning the correct amount of fuel to keep a constant room temperature.



EMBER-GLO™ FEATURE

FOR THE 430 DELUXE AND 616 DELUXE

Ember-Glo™ combines adjustable halogen under-lighting with colored glass and embers in front of the fire to provide an amazingly realistic ember bed effect. This new dramatic feature is turned on and off with the GreenSmart® Remote Control.




ACCENT LIGHTS

Accent Lights are a standard feature in all Deluxe fireplace inserts. This feature adds a warm glow to both the logs and fireplace interior, and can be used when the fire is on or off.



Accent Lights Off

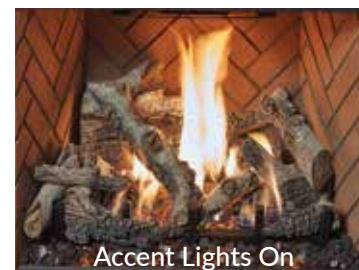

Accent Lights On


Perfect as a nightlight or soft indirect light for the room, the Accent Lights allow for visual enhancement of your fireplace insert 365 days a year. 6 levels to choose from.

Rear accent lights not available on DVS and DVL when using Driftwood or Fyre-Stone Rock Kit.

SIZING YOUR INSERT TO YOUR FIREPLACE

Determine which insert is best for your home based on your fireplace size and heating requirements.

Minimum Fireplace Requirements Per Model

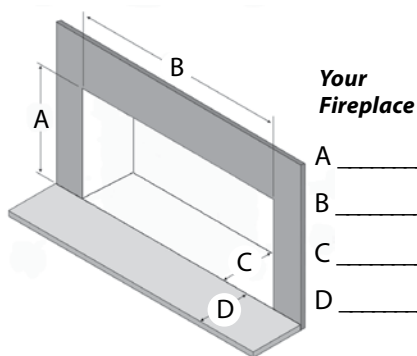

Your Fireplace	A - Height		B - Width		C - Depth		D - Hearth Extension	
	Panel Type	3-Piece or 1-Piece with Trim	1-Piece	3-Piece or 1-Piece with Trim	1-Piece	3-Piece or 1-Piece with Trim	1-Piece	3-Piece or 1-Piece with Trim
A	32 DVS Deluxe	19-1/2"	20-5/8"	26-1/2"	29"	15-5/8" Arch 15-1/8" Rect.	16-7/8" Arch 16-3/8" Rect.	1-1/4"
B	34 DVL Deluxe	23-3/4"	24-7/8"	31-1/2"	32-1/2"	15" Arch 14-1/2" Rect.	16-1/4" Arch 15-3/4" Rect.	1-1/4"
C	430 Deluxe	19-3/4"	20-1/4"	30-1/4"	30-1/2"	14-1/4"	15-1/2"	1-1/4"
D	616 Deluxe	23-1/2"	24-1/4"	34-5/8"	35"	15-1/4"	16-1/2"	1-1/4"



KEEP THEM WARM, KEEP THEM SAFE

All Lopi® gas insert faces come installed with ANSI compliant safety screens. These screens are designed to be virtually invisible and prevent accidental contact with the hot glass surface on the fireplace insert. You may want to take additional safety measures such as adding a firescreen in front of your insert. These precautions will allow everyone in your home to safely enjoy the comfort and warmth of your new gas insert.

LOPI® DESIGN MY FIRE. BE YOUR OWN DESIGNER.

With our New & Enhanced Design My Fire App

Pick your insert, accessories, and extras then snap a photo of your room and upload it to the app to see what your new fire will look like in your room! Visit our website at

WWW.LOPISTOVES.COM.



7-YEAR "REAL WORLD" WARRANTY

Our 7-Year Warranty offers more protection on key components than the so-called "Limited Lifetime" warranties of our competitors. Lopi® builds inserts to last a lifetime.

We'll stand behind the quality and performance of our products year after year because that's the way we do business - and you don't have to read the fine print for your peace of mind.

YEARS 1-2:

All parts and labor on your appliance, including blower and one-way freight allowance.



YEARS 3-5:

All parts and labor on the firebox, door assembly, air control assemblies and one-way freight allowance.

YEARS 6-7: Parts only on firebox, door and air control assemblies.

CUSTOM SHOP FACES



One of our master craftsmen works on applying the Carbon Patina finish to the stunning Wilmington™ face.



WILMINGTON™ FACE

**Hand-Rubbed
Carbon Patina**
(for all models)

This finish offers a timeless look that resembles worn, aged steel with beautiful textures that create subtle high and low lights.

CUSTOM SHOP MANTELS

(for all models)

Add a bold statement to your fireplace insert with one of our unique, hand-crafted mantels that are designed and created by our in-house artists. These non-combustible mantels come in both 5' and 6' lengths, and can also be used as a hearth.

HAND-HEWN TIMBER MANTELS

This is a realistic reproduction of a 150-year-old fir timber. Our artists individually hand-paint each mantel with incredible attention to detail. We challenge anybody to tell the difference between this reproduction and the authentic timber. Hand-Hewn Timber Legs are available for the 6' mantel to achieve a three-sided Timber mantel installation.



POLISHED GRAY CONCRETE MANTELS


Each mantel is individually crafted to expose a smooth, polished quartz surface that offers a bold, contemporary look.




FIREPLACE INSERTS


MID-SIZED

MID-SIZED

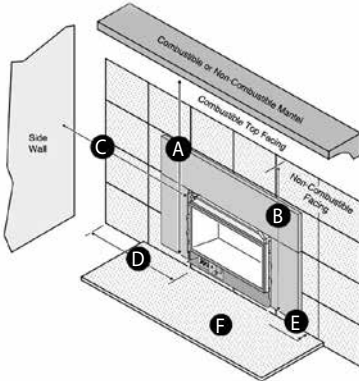FEATURES YOU'RE GOING LOVE	32 DVS DELUXE	430 DELUXE
Ember-Fyre® Burner	YES	NO
Ember-Fyre® II Burner	NO	YES
GreenSmart™ Remote	YES	YES
Comfort Control	YES	YES
Accent Lights	YES (Rear)	YES (Top, Front Ember-Glo™)
Flex Vent Diameter	3" Exhaust - 3" Air Intake	3" Exhaust - 3" Air Intake
Unit Weight	115 lbs.	106 lbs.
Glass Viewing Area <i>(viewing glass will vary slightly with face design)</i>	25-3/8" W x 13-7/8" H 352-1/2 sq. in.	24-3/8" W x 17-5/8" H 430 sq. in.
Powerful Convection Fans	180 CFM	180 CFM
PERFORMANCE	*Heating Capacity can be affected by negative pressure in the home and by prevailing atmospheric conditions. Contact local building or fire officials about restrictions and installation requirements in your area.	
Heating Capacity*	Up to 1,500 square feet	Up to 1,500 square feet
BTU Input (NG)	31,000 (high) - 10,700 (low)	31,000 (high) - 9,900 (low)
BTU Input (LP)	31,000 (high) - 12,600 (low)	31,000 (high) - 7,500 (low)
Steady State Efficiency Up To (High) <i>Steady State Efficiency determined using maximum venting</i>	88.77% (NG), 90.13% (LP)	85.55% (NG), 86.50% (LP)
Canada Energuide Efficiency <i>FE Efficiency determined using CSA P.4.1-15.</i>	76.17% (NG), 78.05% (LP)	73.77% (NG), 74.73% (LP)
AFUE Efficiency	80.90% (NG), 83.30% (LP)	81.80% (NG), 80.70% (LP)
CLEARANCES TO COMBUSTIBLES	Installation information is available at your local Lopi® dealer or online at www.lopistoves.com	
A = Floor to Mantle	A = 35"* (889mm)	A = 34-1/2"* (877mm)
B = Floor to Top Facing	B = 35" (889mm)	B = 32-3/8" (823mm)
C = Insert to Sidewall	C = 4-1/2" (114mm)	C = 5" (127mm)
D = Insert to Side Facing	D = 4-1/2" (114mm)	D = 3-3/8" (186mm)
E = Extension onto Hearth**	E = 0" or 1-1/4" (32mm) with panel trim	E = 0" or 1-1/4" (32mm) with panel trim
F = Hearth Dimensions	F = 0" or 1-1/4" (32mm) with panel trim	F = 0" or 1-1/4" (32mm) with panel trim
	<p>* Maximum 12" mantle depth **0" If used with one piece panel without trim</p> <p>Note: A & B - measured from floor. C & D - measured from side of unit.</p>	<p>* Maximum 12" mantle depth. See Owner's Manual for clearances when using less than 12" mantle depth. **0" If used with one piece panel without trim</p> <p>Note: A & B - measured from floor. C & D - measured from side of unit.</p>
SURROUND PANEL SIZES	Measurements for each panel is for maximum fireplace opening coverage. 3 and 4 sided Custom Fit Panels are available from your Lopi® dealer.	
Arched 8" sides x 10" top	40-5/16" W x 23-1/2" H, side 40-5/16" W x 28-7/8" H top	N/A
Rectangular 4" sides x 6" top	37-1/8" W x 25" H	N/A
Rectangular 10" sides x 13" top <i>(all can be trimmed for inside fit of fireplace opening)</i>	44-5/16" W x 31-7/8" H	N/A
One Piece Small	38" W x 25" H	38" W x 25" H
One Piece Large	40" W x 28-1/2" H	40" W x 28-1/2" H

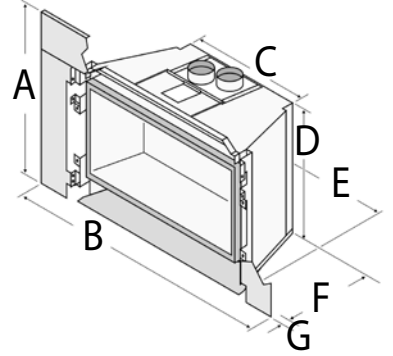32 DVS DELUXE
DIMENSIONS

A	Small 25" (635mm) Large 28" (711mm)
B	Small 38" (965mm) Large 40" (1,016mm)
C	18" (458mm)
D	19-1/2" (496mm)
E	26-1/2" (674mm)
F	15-1/8" (385mm)
G	0" with 1 piece panel, 1-1/4" (32mm) when using 3 piece panel or 1 piece panel with trim

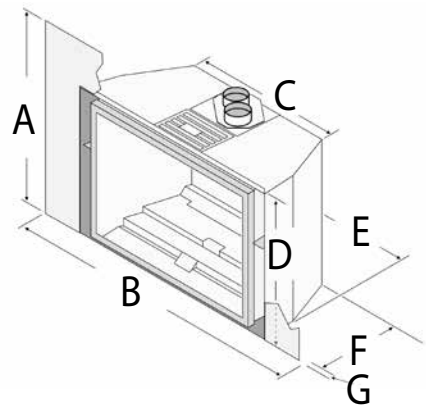430 DELUXE
DIMENSIONS

A	Small 25" (635mm) Large 28-1/2" (724mm)
B	Small 38" (966mm) Large 40" (1016mm)
C	21" (534mm)
D	20-1/4" (515mm)
E	30-1/2" (775mm)
F	15-1/2" (394mm)
G	0" or 1-1/4" (32mm) when using panel with trim

LARGE

LARGE

FEATURES YOU'RE GOING LOVE	34 DVL DELUXE	616 DELUXE
Ember-Fyre® Burner	YES	NO
Ember-Fyre® II Burner	NO	YES
GreenSmart™ Remote	YES	YES
Comfort Control	YES	YES
Accent Lights	YES (Top & Rear)	YES (Top, Front Ember-Glo™)
Flex Vent Diameter	4" Exhaust - 3" Air Intake	4" Exhaust - 3" Air Intake
Unit Weight	135 lbs.	133 lbs.
Glass Viewing Area <i>(viewing glass will vary slightly with face design)</i>	29"W x 18"H 522 sq. in.	28-7/8"W x 21-3/8"H 616 sq. in.
Powerful Convection Fans	180 CFM	180 CFM

PERFORMANCE


*Heating Capacity can be affected by negative pressure in the home and by prevailing atmospheric conditions. Contact local building or fire officials about restrictions and installation requirements in your area.

Heating Capacity*	Up to 2,000 square feet	Up to 2,000 Square feet
BTU Input (NG)	40,000 (high) - 11,900 (low)	39,000 (high) - 12,000 (low)
BTU Input (LP)	40,000 (high) - 7,400 (low)	39,000 (high) - 9,000 (low)
Steady State Efficiency Up To (High) <i>Steady State Efficiency determined using maximum venting</i>	86.95% (NG), 88.39% (LP)	83.88% (NG), 85.39% (LP)
Canada Energuide Efficiency <i>FE Efficiency determined using CSA P.4.1-15.</i>	75.21% (NG), 76.01% (LP)	71.19% (NG), 73.04% (LP)
AFUE Efficiency	79.90% (NG), 81.00% (LP)	74.10% (NG), 73.70% (LP)

CLEARANCES TO COMBUSTIBLES

Installation information is available at your local Lopi® dealer or online at www.Lopistoves.com

A = Floor to Mantle	A = 35-1/2"* (902mm)	A = 36-1/2"* (927mm)
B = Floor to Top Facing	B = 35-1/2" (902mm)	B = 35-1/2" (902mm)
C = Insert to Sidewall	C = 4" (102mm)	C = 6" (152mm)
D = Insert to Side Facing	D = 4" (102mm)	D = 5" (102mm)
E = Extension onto Hearth**	E = 0" or 1-1/4" (32mm) with panel trim	E = 0" or 1-1/4" (32mm) with panel trim
F = Hearth Dimensions	F = 0" or 1-1/4" (32mm) with panel trim	F = 0" or 1-1/4" (32mm) with panel trim

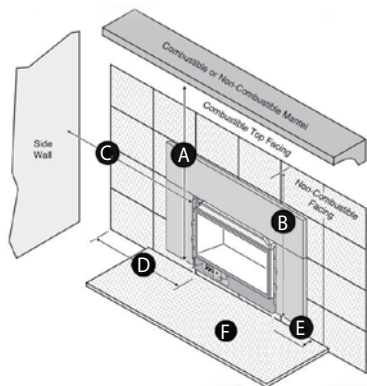

* Maximum 12" mantle depth
**0" If used with one piece panel without trim

Note:
A & B - measured from floor.
C & D - measured from side of unit.

* Maximum 12" mantle depth.
See Owner's Manual for clearances when using less than 12" mantle depth.
**0" If used with one piece panel without trim


Note:
A & B - measured from floor.
C & D - measured from side of unit.

SURROUND PANEL SIZES

Measurements for each panel is for maximum fireplace opening coverage. 3 and 4 sided Custom Fit Panels are available from your Lopi® dealer.


Arched 8" sides x 10" top	44-3/16"W x 28-1/2" H side 44-3/16"W x 33-3/8" H top	N/A
Rectangular 4" sides x 6" top	40"W x 29" H	N/A
Rectangular 8" sides x 10" top	44-3/16"W x 33-3/8" H	N/A
Rectangular 10" sides x 13" top <i>(all can be trimmed for inside fit of fireplace opening)</i>	48-1/8"W x 36-3/8" H	N/A
One Piece Small	42"W x 30-1/2" H	42"W x 30-1/2" H
One Piece Large	44"W x 34" H	44"W x 34" H

34 DVL DELUXE

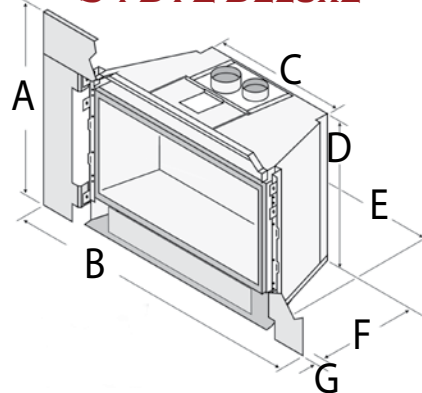

A	See Surround Panels for sizing
B	See Surround Panels for sizing
C	20" (508mm)
D	23-3/4" (604mm)
E	31-1/2" (801mm)
F	14-1/2" (369mm)
G	0" with 1 piece panel 1-1/4" (32mm) when using 3 piece panel or 1 piece panel with trim

616 DELUXE DIMENSIONS

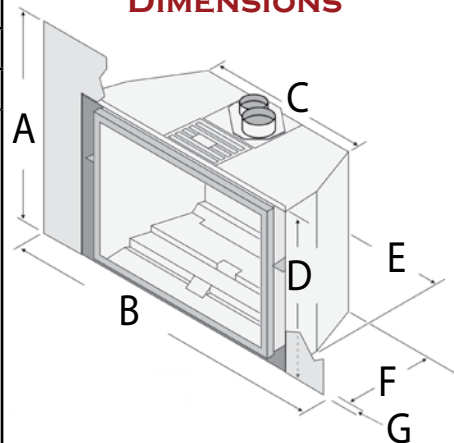


A	Small 30-1/2" (775mm) Large 34" (864mm)
B	Small 42" (1067mm) Large 44" (1118mm)
C	24" (610mm)
D	23-5/16" (592mm)
E	34" (864mm)
F	16" (406mm)
G	0" or 1-1/4" (32mm) when using panel with trim

PROFESSIONAL HEARTH DEALERS

Only the most professional specialty hearth retailers are selected to sell Lopi® inserts. They represent our total commitment to exceptional products and excellent service. In addition, they have successfully completed special training programs in the proper selection, installation, and service of all Lopi® products.

Your professional Lopi® hearth dealers are experts who can advise you on everything from customizing the color of your appliance to selecting appropriate venting and chimney materials.



Lopi® produces a wide variety of quality wood, pellet and gas hearth appliances.

Find your favorite fire today by visiting: www.lopistoves.com.

TESTED & CERTIFIED

ANSI Z21.88-2014/CSA 2.33-2016 "Vented Gas Fireplace Heater", CGA 2.17-M91 (R2009) "Gas Burning Heating Appliances for Manufactured Homes", and CSA P.4.1-15 Testing method for measuring annual fireplace efficiency. We recommend all Lopi® appliances be installed and maintained on an annual basis by your Specialty Hearth Retailer.

Improper installation of your gas appliance or failure to operate it in accordance to the guidelines detailed in the Owner's Manual may negate your warranty and endanger your home and family. Installation information is available on our website at www.LopiStoves.com.

MADE IN AMERICA



Our fireplace inserts are proudly manufactured in America at The House of Fire. If you're ever in the Seattle area, we invite you to take a free tour of The House of Fire world-class manufacturing plant. You will meet the artisans, engineers, craftsmen and craftswomen who design and hand build these fabulous appliances. Wear comfortable shoes, the factory is eleven acres indoors!


YOUR LOPI® AUTHORIZED DEALER:



www.Lopistoves.com

Manufactured
By Travis Industries, Inc.
Mukilteo, WA

Lopi® Gas Inserts are protected by one or more of the following patents; U.S. 8,469,021, 7,066,170, 6,602,068, 6,443,726, 6,953,037; Canada 2755517 as well as other U.S. and Foreign Patents pending. Lopi® reserves the right to alter or improve its products at any time without notification. All trademarks belong to Travis Industries. For installation specifications refer to the Owner's Manual found on the Lopi® website.



02/2020 Printed in U.S.A. #98800716