

# PREMIUM LINEAR GAS FIREPLACES

**FIREPLACE**  
FIREPLACE XTRORDINAIR



## A Transitional Interpretation of Fire

Fireplace Xtrordinair® has pushed the limits of fire once again, by creating our most transitional lineup of fireplaces yet. We've taken a traditional fireplace and extended the length to give it a sleek linear profile with tall, dancing flames that emerge from a bed of glowing, under-lit crushed glass. The result is our Premium High Output Linear Deluxe Gas Fireplace Series.

### *The Perfect Balance of Beauty and Function*

The 3615, 4415, 4415 See-Thru, and 6015 models are high output heaters that represent the very best of home heating and style. These fireplaces feature variable heat outputs and can be personalized or finished to complement any home's décor, making them perfect for any living space, from cozy dens to great rooms.

### *Quality and Craftsmanship*

Our fireplaces are proudly manufactured in America at the House of Fire in Mukilteo, Washington. We utilize the finest materials and subject them to vigorous testing standards to make fireplaces that stand up to the rigors of time. These fireplaces are the best money can buy.

*4415™ See-Thru shown with the LedgeStone Fireback, Driftwood Log Set, and Bronze Glass.*



## Features You're Going to Love

- High output home heaters
- Sleek linear burner with tall dancing flames
- Adjustable under-lit accent lighting highlights the beautiful flames and glass media. This feature can also be used as mood lighting in the room when the fireplace is not burning.
- GreenSmart® Deluxe multi-function wireless thermostat remote control
- 180 CFM convection fan circulates heated air throughout the home.
- Transitional Fyre-Art™ and media options.
- Huge neo-ceramic glass viewing area with nearly invisible ClearFire™ safety screen.
- Bi-metallic damper in the exhaust automatically opens at start-up and closes as the fireplace heats up to ensure the best looking flame and performance at all times.
- Heavy duty, welded 14-gauge steel fireplace body.



3615™ shown with the Tile Trim Kit, LedgeStone Fireback, and Bronze Glass.



4415™ shown with the Black Glass Fireback, Birch Log Set, and Platinum Glass.



6015™ shown with the Gallery Face, Black Glass Fireback, Tumbled Stone Kit, and Rock Embers.


**BUILD YOUR PERFECT FIRE**  
With our Design My Fire Web App




Or visit our website at **FIREPLACEX.COM**

## INTERIOR FLOOR MEDIA (Required)


Choose between sleek colored crushed glass or rock embers for the floor of your fireplace.



Platinum Glass



Bronze Glass



Cobalt Glass



Reflective Black Glass



Rock Embers

## FIREBACKS (Required)

Select one of our decorative firebacks to enhance the interior of your fireplace.



Black Painted Fireback  
Creates the illusion of a large, deep firebox.



High Gloss Black Glass Fireback  
Creates a rich flame reflection.



Ledgestone Fireback  
A naturally dramatic fireback with three-dimensional shadowing from the flames and light.

## FYRE-ART™ (Optional)

Although not required, these transitional Fyre-Art™ options allow you to personalize your fireplace with a little added style.



Tumbled Stones



Driftwood Twigs and Stones



Traditional Log Set



Birch Log Set



Driftwood Log Set

## TRIMS & FACES

Finish your fireplace by selecting the trim or face style that best complements your decor.



### Beveled Tile Trim Kit

A sleek, modern look with beveled edges that beautifully frames the fire.




### 2" Trim Kit

A simple decorative option that offers a clean, finished look.



### IronWorks™ Trim

A hand-hammered charcoal painted option to add style and color.

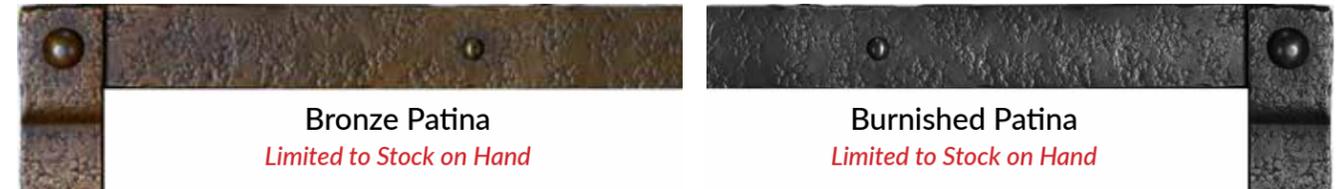

### Bronze Patina

Limited to Stock on Hand

### Burnished Patina

Limited to Stock on Hand

### Gallery Face Option

The Gallery Face is black painted and accommodates tile or stone facing up to 1" deep. It features beveled sides that draw the eye in towards the fire, giving the fireplace a larger presence.

Dimensions by model.


3615: 47" W x 19-5/8" H

4415: 55" W x 19-5/8" H

6015: 71" W x 19-5/8" H



## Safely Add A TV Above Your Linear Fireplace With The Optional CoolSmart TV Wall™ Kit

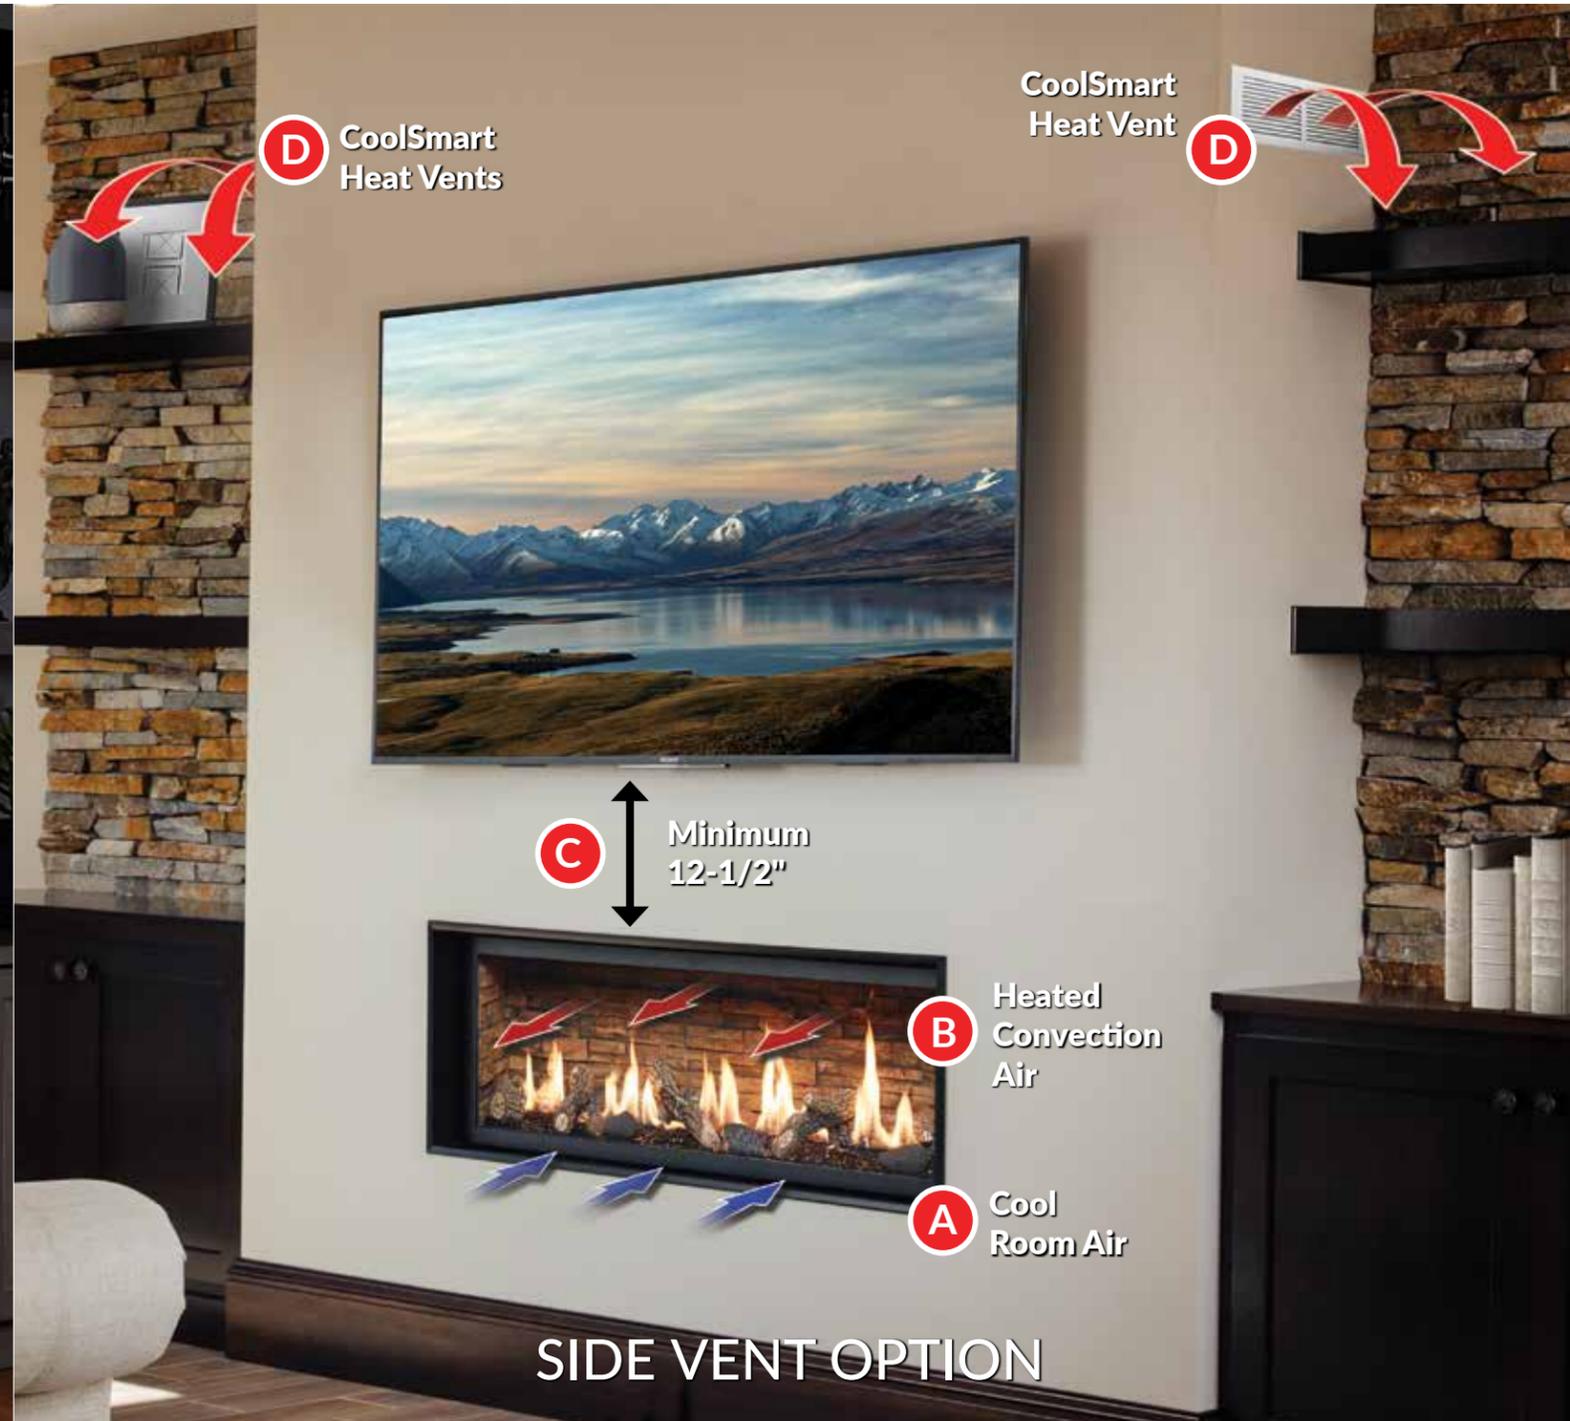

- A** Cool room air is naturally pulled into the bottom of the convection chamber surrounding the firebox.
- B** If the convection fan is turned on, the heated air is returned to the room above the fireviewing glass.
- C** The CoolSmart TV Wall™ Kit allows a TV to be safely installed above the fireplace, either flush or recessed up to 4-1/4" into the wall.

- D** If the fan is turned off, cool room air and the majority of the heated convection air are naturally drawn up through the CoolSmart Heat Vent(s) and returned to the room above the TV. This reduces the height the TV needs to be installed above the fireplace.

Coolsmart TV Wall™ Kit Is Not Available For The 4415 See-Thru Model



These Deluxe Gas Fireplaces feature the patented GreenSmart® System.

This proprietary system is the most innovative collection of components, controls, and technology that when combined provides an elegant, greener, and smarter way to heat your home.

### GreenSmart® Deluxe Multi-Function Wireless Thermostat Remote Control



#### Remote Functions:

- Two Thermostat Modes
- Change Between IPI GreenSmart® and CPI Pilot Modes
- Flame Adjustment (6 levels)
- Convection Fan Operation (6 levels)
- Under-lit Accent Lights

## SPECIFICATIONS

### Model 3615

- Heating Capacity\*: Up To 1,700 sq. ft.
- Variable Input: 18,331 to 33,000 BTUs/Hr (NG)  
17,555 to 33,000 BTUs/Hr (LP)
- Glass Size: 34" W (864 mm) x 13" H (330 mm)
- Steady State (High)\*\*: Up to 75.22% NG and Up to 77.38% LP
- EnerGuide P4 Efficiency:\*\*†: 61.96% NG and 64.08% LP

### Model 4415

- Heating Capacity\*: Up To 2,100 sq. ft.
- Variable Input: 21,672 to 42,000 BTUs/Hr (NG)  
21,413 to 42,000 BTUs/Hr (LP)
- Glass Size: 42" W (1118 mm) x 13" H (330 mm)
- Steady State (High)\*\*: Up to 77.08% NG and Up to 77.39% LP
- EnerGuide P4 Efficiency:\*\*†: 63.41% NG and 64.14% LP

### Model 4415™ See-Thru

**NOT APPROVED FOR INDOOR/OUTDOOR INSTALLATION**

- Heating Capacity\*: Up To 2,100 sq. ft.
- Variable Input: 21,672 to 42,000 BTUs/Hr (NG)  
21,413 to 42,000 BTUs/Hr (LP)
- Glass Size: 2 x 42" W (1118 mm) x 13" H (330 mm)
- Steady State (High)\*\*: Up to 80.67% NG and Up to 82.84% LP
- EnerGuide P4 Efficiency:\*\*†: 71.50% NG and 73.54% LP

### Model 6015

- Heating Capacity\*: Up To 2,800 sq. ft.
- Variable Input: 30,273 to 56,000 BTUs/Hr (NG)  
29,626 to 56,000 BTUs/Hr (LP)
- Glass Size: 58" W (1473 mm) x 13" H (330 mm)
- Steady State (High)\*\*: Up to 77.34% NG and Up to 78.74% LP
- EnerGuide P4 Efficiency:\*\*†: 63.26% NG and 65.27% LP

\* Heating Capacity will vary with floor plan and ceiling height, insulation, and outside ambient temperature.

\*\* Your results may vary depending on your vent configuration.


† P4 Efficiency determined using CSA P4.1-09.

### Minimum Clearances To Combustibles For Models 3615, 4415 and 6015

**A** = Clearance to Side of Fireplace 5/8" (16mm). Do not place insulation in this space.

**B** = Clearance to Back of Fireplace 1/8" (4mm). Do not place insulation in this space.

**C** = When installed, walls in front of the fireplace must be a minimum 3" (77mm) to the side of the fireplace.

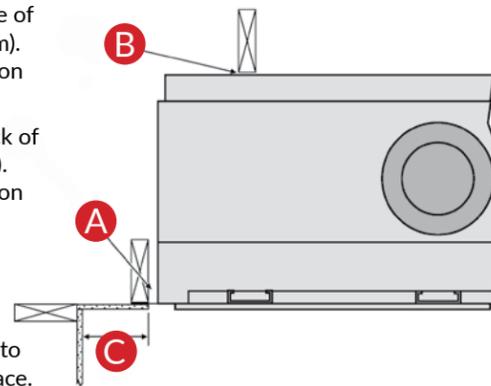


### Minimum Clearances To Combustibles For 4415 See-Thru

The 4415 See-Thru fireplace cannot be installed as an Indoor/Outdoor Fireplace as this would allow outside air infiltration into the home. If installed in an Indoor/Outdoor application, the dealer nor Travis is responsible for any issues that will arise.

**A** = Clearance to Side of Fireplace 5/8" (16mm). Do not place insulation in this space.

**B** = When installed, walls in front of the fireplace must be a minimum 3" (77mm) to the side of the fireplace.

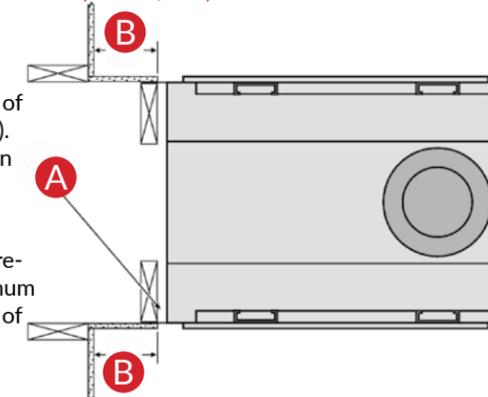

**NOTE: ALWAYS REFER TO THE PRODUCT OWNER'S MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS. FAILURE TO DO SO CAN RESULT IN VOIDING OF THE WARRANTY AND PRESENT A POTENTIAL SAFETY HAZARD! MANUAL CAN BE FOUND AT WWW.FIREPLACEX.COM**


### Optional Power Heat Duct Kit (Not available for 4415™ See-Thru)

The heating power of these fireplaces can be used to heat additional rooms in your home with the optional Power Heat Duct Kit.

The Power Heat Duct Kit is perfect for times when you want to enjoy the beauty and ambiance of your fireplace without all the heat in the room the fireplace is located.

Each kit consists of a 130 CFM fan and gives you the ability to redirect up to 50%\* of the heat from your fireplace into one or two additional rooms within 20 feet of the fireplace. This allows you to properly manage the heat output throughout your home so that you can maintain a comfortable temperature in your main living space without having to turn down the fire.



\* When using two kits.

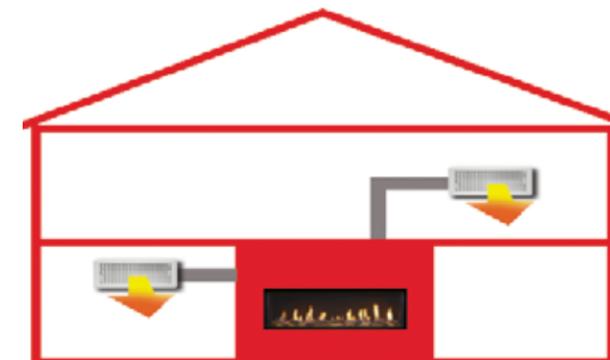

## Minimum Framing Requirements *(See owner's manuals for details)*

Framing illustrated below cannot be used with the CoolSmart TV Wall™ Kit. See the CoolSmart TV Wall™ Kit Installation Instructions for correct framing dimensions with this option.

If installing a TV above fireplace see the Installation Manual and the CoolSmart TV Wall™ Kit for clearance requirements .

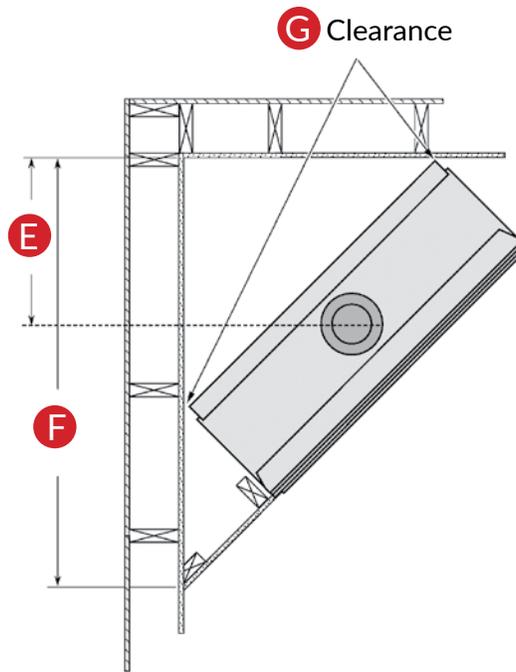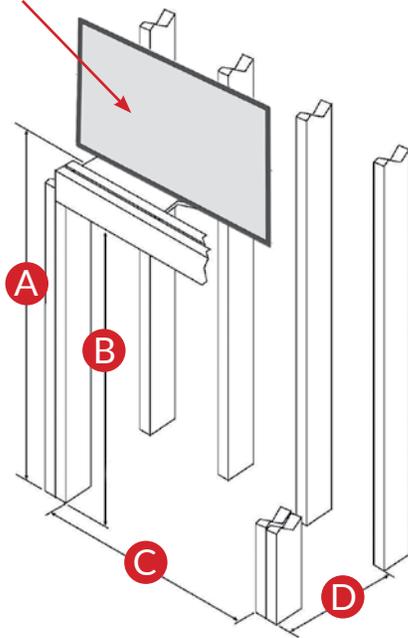

**NOTE: ALWAYS REFER TO THE PRODUCT OWNER'S MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS. FAILURE TO DO SO CAN RESULT IN VOIDING OF THE WARRANTY AND PRESENT A POTENTIAL SAFETY HAZARD! MANUAL CAN BE FOUND AT [WWW.FIREPLACEX.COM](http://WWW.FIREPLACEX.COM)**

### Model 3615

A - 54" (1372mm)  
B - 54" (1372mm)  
C - 40-3/4" (1036mm)  
D - 17" (432mm)  
E - 19-1/2" (495mm)  
F - 52-1/8" (1324mm)  
G - 5/8" (16mm)

### Model 4415

A - 60" (1524mm)  
B - 60" (1524mm)  
C - 48-3/4" (1239mm)  
D - 17" (432mm)  
E - 22-1/2" (572mm)  
F - 58-1/4" (1480mm)  
G - 5/8" (16mm)

### Model 4415 See-Thru

A - 64" (1626mm)  
B - 64" (1626mm)  
C - 52-1/4" (1328mm)  
D - 16-1/4" (413mm)

### Model 6015

A - 66" (1677mm)\* 72" (1829mm LP)\*\*  
B - 66" (1677mm)\* (72" 1829 mm LP)\*\*  
C - 64-3/4" (1645mm)  
D - 17" (432mm)  
E - 29" (737mm)  
F - 69" (1753mm)  
G - 5/8" (16mm)

\*NG (all configurations) or LP with 36" Rise (or greater)  
\*\*LP with Minimum Vent (24" Rise)

## Optional Power Exhaust Vent Kit - **Horizontal Termination ONLY!**

For difficult venting restrictions, we offer a Power Exhaust Vent Kit that allows you to install our gas fireplaces virtually anywhere in your home. This Power Exhaust Vent Kit accommodates vent runs up to 100 feet, or up to 50 feet either horizontal or vertical, with a maximum of 12 elbows! This fan option requires electricity to operate the fireplace.



## 7-YEAR "REAL WORLD" WARRANTY

Our 7-Year Warranty offers more protection on key components than the so-called "Limited Lifetime" warranties of our competitors. Fireplace Xtordinaire® builds fireplaces to last a lifetime.

We'll stand behind the quality and performance of our products year after year because that's the way we do business - and you don't have to read the fine print for your peace of mind. We even continue to sell service parts that date back 42 years.

### YEARS 1-2:

All parts, electronics, and labor (Light bulbs, paint and gaskets are excluded. .

### YEARS 3-5:

All parts and labor on the firebox and glass frame (not including screen or glass). Electronics, electrical components, burner and accessories are excluded.

### YEARS 6-7:

Parts only on the firebox.

**FIREPLACE**  
**XTRORDINAIR**

See our complete line of fireplaces and inserts at: [www.fireplacex.com](http://www.fireplacex.com)

Manufactured by Travis Industries, Inc - Mukilteo, WA

FireplaceX™ Gas Fireplaces are protected by one or more of the following patents; U.S. 8,469,021, 7,066,170, 6,602,068, 6,443,726, 6,953,037; Canada 2755517 as well as other U.S. and Foreign Patents pending. Photos and illustrations are for descriptive purposes only. We reserve the right to improve or change our products without prior notification. GreenSmart® and all other trademarks belong to Travis Industries, Inc. Consult the Installation Manual for complete installation requirements.