

42 Apex

WOOD FIREPLACE

FIREPLACE
XTRORDINAIR
FIREPLACEX.COM



The 42 Apex is shown with the hand-crafted Timberline™ Charcoal Painted Face.

The 42 Apex™ utilizes bulletproof catalytic technology to deliver high-performance, efficient, clean-burning heat. Super-long burn times and very high BTUs ranges make these powerhouse home heaters. Express your personal style and enhance your spectacular fire view with one of the three available faces. Available with the optional GreenStart igniter - Start your fire with the push of a button!

Heating Capacity: Up to 2,500 Sq. Ft.

Maximum Burn Time: Up to 12 Hrs.

Log Length: 24"

EPA Tested BTUs (Cord Wood): 13,537 to 49,626

Real World BTUs: EPA tests to determine BTU output are achieved with a single load of wood at each burn rate.

At home, you are likely to add more wood to your stove to maintain your desired comfort level. By the simple process of loading your stove with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.

Emissions: 0.93 Grams/Hr. (Cord wood)

LHV Overall Efficiency:* Up to 79%

HHV Overall Efficiency:* Up to 73%

Firebox: 3.5 Cubic Ft.


Glass Viewing Area: Ceramic Glass, 25-5/8" W x 12-7/8" H, 328.7 Sq. In.

*Overall efficiency as tested using B-415.1 using Cord Wood. LHV = Low Heat Value, HHV = High Heat Value.

42 Apex Framing Guide




12521 Harbour Reach Drive
Mukilteo, WA 98275-5458

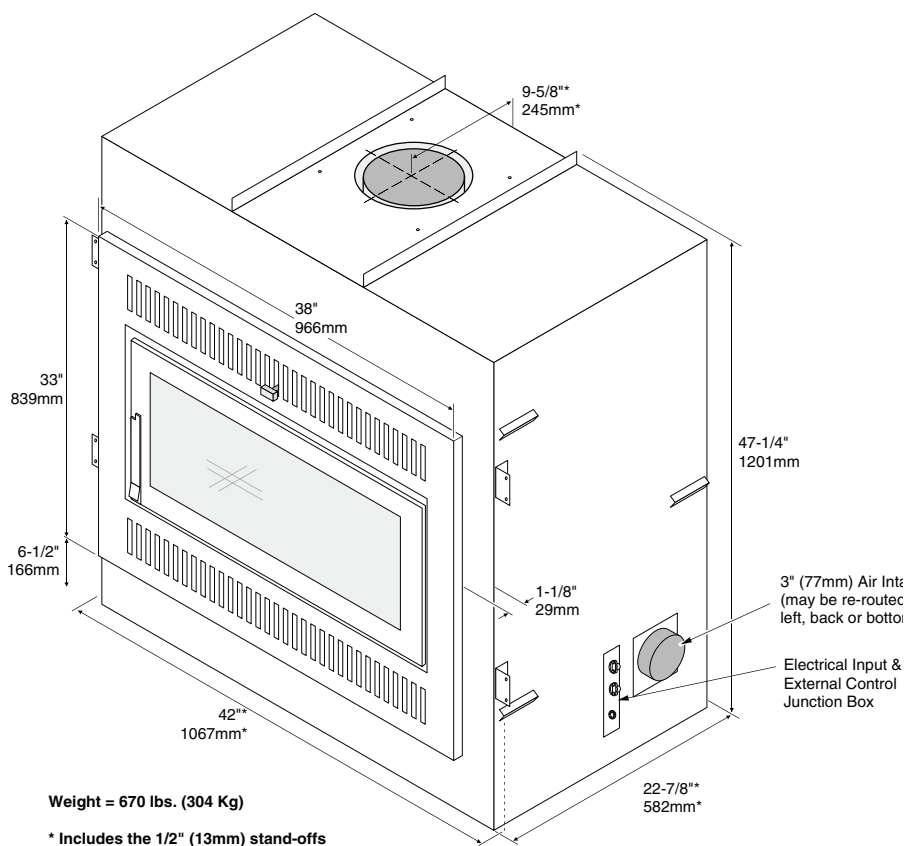

Weight = 670 lbs. (304 Kg)

* Includes the 1/2" (13mm) stand-offs

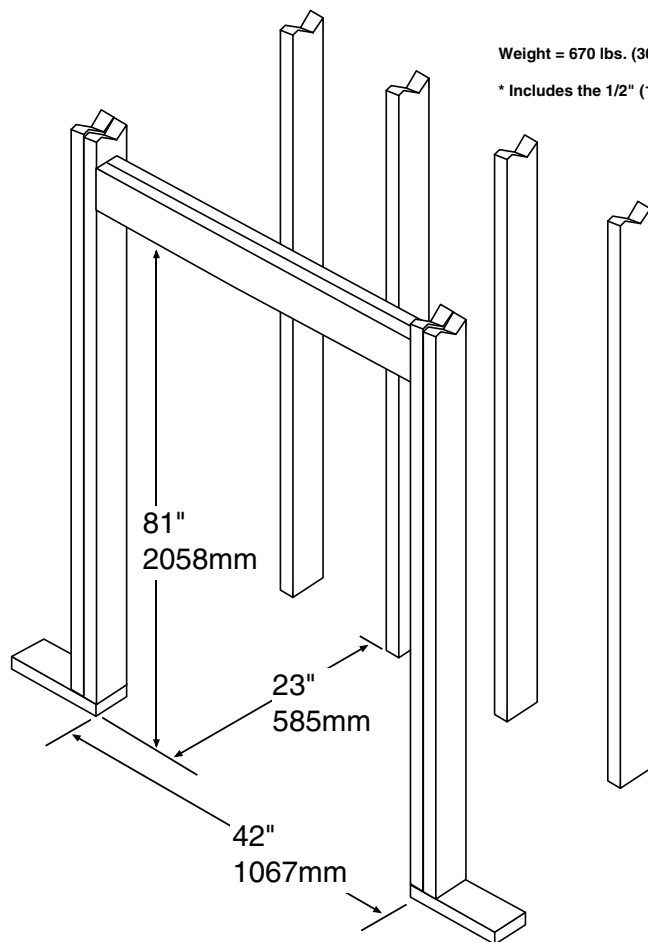

This document is for reference purposes only. Consult the installation manual **BEFORE** making installation decisions.

Scan for
Installation Manual



FIREPLACE
XTRORDINAIR

Manufactured in
Mukilteo, WA
By Travis Industries

© 08/2021