

44 Elite

WOOD FIREPLACE

FIREPLACE
XTRORDINAIR
FIREPLACEX.COM



The 44 Elite is shown with the Charcoal Painted Artisan™ Double Door.

The 44 Elite really brings the heat! This powerhouse catalytic home heater has the largest firebox available in its class and can heat grand spaces up to 3,000 square feet. This massive fireplace features a huge viewing area and our signature Posi-Pressure technology, which utilizes fresh outside air to evenly heat your entire home.

Heating Capacity:*	Up to 3,000 square feet
Maximum Burn Time:	Up to 12 hours
Log Length:	32"
Maximum BTUs:	Up to 78,046 BTUs (Burn on high)
Real World BTUs:	EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your stove to maintain your desired comfort level. By the simple process of loading your stove with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.
Emissions:**	1.8 grams/particulate per hour (cord wood)
LHV Overall Efficiency:**	Up to 79%
HHV Overall Efficiency:**	Up to 73%
Firebox:	4.2 cubic foot
Glass Viewing Area:	Ceramic Glass, Double Door 14-3/8" W x 18-1/4" H (each side), 473.6 Sq. In.

*Heating Capacity will vary with floor plan, insulation and outdoor temperature.


**Overall efficiency as tested using B-415.1 using Cord Wood. LHV = Low Heat Value, HHV = High Heat Value.

44 Elite Framing Guide




12521 Harbour Reach Drive
Mukilteo, WA 98275-5458

Weight: 680 Lbs.

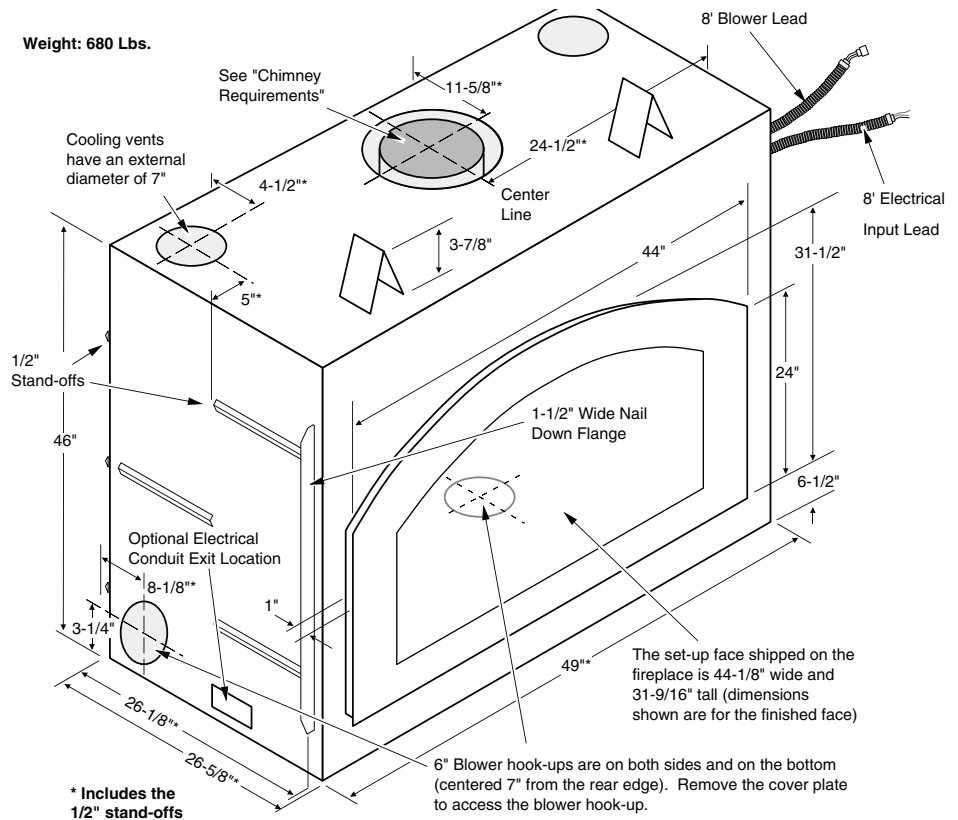

The fireplace enclosure must not be less than 81" above the base of the fireplace.

- If the fireplace is raised, the enclosure height must be raised to maintain the 81".
- Do not build into this area.
- Do not slope the walls inward.

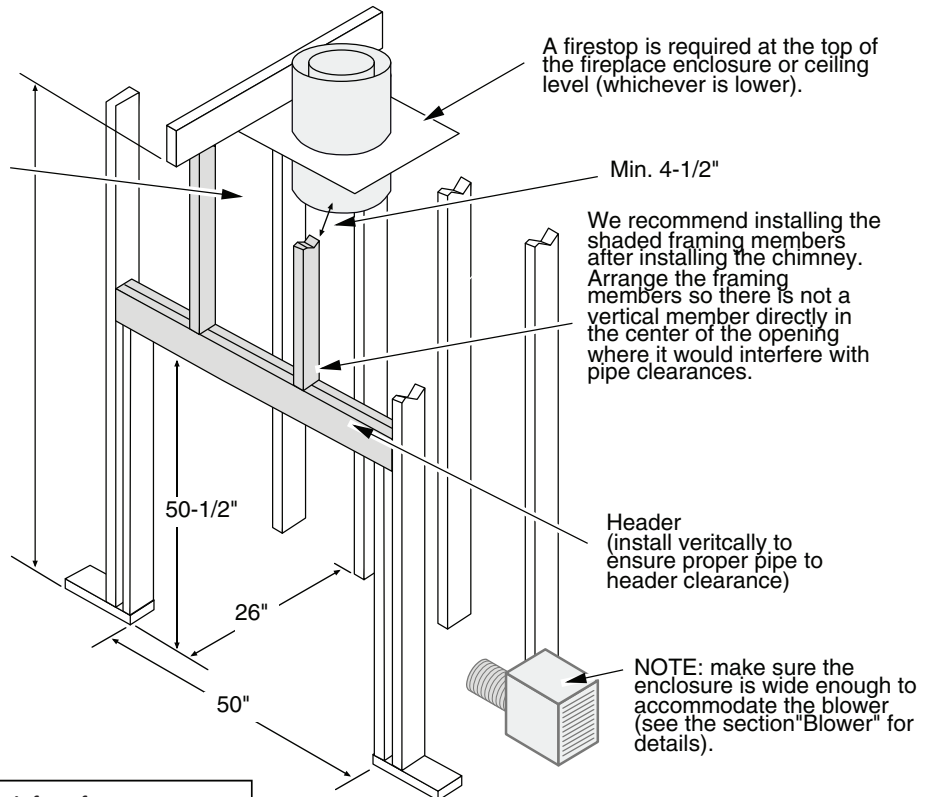

Scan for
Installation Manual



This document is for reference purposes only. Consult the installation manual BEFORE making installation decisions.

FIREPLACE
XTRORDINAIR

Manufactured in
Mukilteo, WA
By Travis Industries

© 08/2021