

ProBuilder™ 42 Linear GAS FIREPLACE

FIREPLACE
XTRORDINAIR
FIREPLACEX.COM



The ProBuilder 42 Deluxe is shown with Bronze Glass Media, standard Under-lit Accent Lights, Tumbled Stone Fyre-Art™ and the Custom Shop Polished Gray Concrete Mantel.

The ProBuilder 42 Linear is the smallest fireplace in the lineup, featuring 42" wide by 15" tall glass. This model is ideal for living spaces such as bedrooms or family rooms. The tall dancing flames will enchant, while the tranquility of the Tumbled Stone Fyre-Art™ relaxes and soothes. The Polished Gray Concrete Mantel from our Custom Shop further complements the room's dynamic.

- Heating Capacity*: Up to 1,250 Sq. Ft.
- BTU/Hr. Input (NG/LP): 13,000 to 25,000 (50% turndown)
- P4 Efficiency: MV: 64.80% (NG) 65.89% (LP)
GSB: 65.74% (NG) 66.88% (LP)
Deluxe: 65.74% (NG) 66.88% (LP)
- Steady State Efficiency Up to 76.11% (NG) Up to 77.31% (LP)
- Weight: 165 lbs. (75 kg).
- Viewing Area: Tempered Glass - 40-3/4" W x 13-3/4" T

*Heating capacity will vary with floor plan, insulation, and outside temperature.

ProBuilder™ 42 Linear

Standard Features MV Models

No power required to install and operate.

- Millivolt Continuous Pilot with Piezo Igniter
- No Power Required - Batteries are required with optional remote. 110V power is required with optional Fan or Accent Light.
- ON/OFF Wall Switch
- Easy Access Controls

Standard Features GSB Models

Features an economical electronic ignition system.

- Continuous Pilot or Basic GreenSmart® Ignition Modes
- 110 V Power Required, Built-in Automatic Battery Backup
- ON/OFF Wall Switch
- Easy Access Controls

Standard Features Deluxe Models

Includes a combination of incredible exclusive features.

- Continuous Pilot or GreenSmart® Ignition Modes
- Under-lit Accent Lighting
- 110 V Power Required, Built-in Automatic Battery Backup
- 180 CFM Variable Speed Convection Fan
- All Functions Are Controlled From the GreenSmart® Remote

Optional Accessories for MV & GSB Models

Basic GreenSmart® Wireless Thermostat Remote Control

- Manual Setting - ON/OFF controls.
- Thermostat Setting - Fireplace turns ON/OFF to maintain your desired home/room temperature.

Convection Fan

Variable speed 180 CFM* fan helps increase the natural convection of heated air into the room as it circulates around the firebox and glass frame. The fan speed is manually controlled by a rheostat dial.

*Cubic Feet Per Minute


Wired Wall Timer

The wired wall timer allows you to set the shut off time of your fireplace in 30 minute increments with a two hour maximum time limit.

Accent Lights

Accent Lights are an optional feature in the MV and GSB fireplaces. This feature adds a warm glow below the glass floor media and can be used when the fire is on or off.

Standard GreenSmart® Multi-Function Wireless Thermostat Remote Control

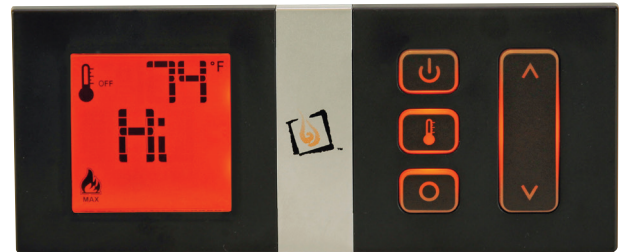

- Manual
- Thermostat and Smart Thermostat Modes
- Flame Adjustment (6 Levels)
- Change Between GreenSmart® and Continuous Pilot Modes
- Fan Operation
- Underlit Accent Light

Optional Accessories for All ProBuilder Linear Models

Fyre-Art™

These decorative options allow you to personalize your fireplace with a little added style.



Tumbled Stone



Driftwood & Stones



Driftwood Logs



Traditional Logs



Birch Logs


Power Exhaust Vent

The Power Exhaust Vent allows you to install these gas fireplaces virtually any-where in your home, by accommodating even the most difficult venting restrictions. This option requires electricity to operate your fireplace.


CoolSmart TV Wall™

Our optional CoolSmart TV Wall™ Kit allows you to safely install a television above your gas fireplace (either recessed or mounted), without requiring a mantel.

Firebacks



LedgeStone



High Gloss Black Glass

FIREPLACE
XTRORDINAIR

Manufactured in
Mukilteo, WA
By Travis Industries

© 08/2021