

ProBuilder™ 54 Linear

GAS FIREPLACE

FIREPLACE
XTRORDINAIR
FIREPLACEX.COM



The ProBuilder 54 Deluxe is shown with Black Glass Fireback, Black Glass Media and Driftwood Fyre-Art.™

The ProBuilder 54 Linear is perfect for mid-size to larger entertaining spaces with its 54" wide by 15" tall glass. The relaxing yellow flames will complement a large variety of styles. Keep it contemporary or add the earthy Driftwood & Stones Fyre-Art™ kit to enhance your rooms ambience.

- Heating Capacity*: Up to 1,650 Sq. Ft.
- BTU/Hr Input (NG/LP): 17,000 to 33,000 (50% turndown)
- P4 Efficiency:
 - MV: 65.11% (NG) 66.3% (LP)
 - GSB: 65.93% (NG) 67.07% (LP)
 - Deluxe: 65.93% (NG) 67.07% (LP)
- Steady State Efficiency: Up to 67.25% (NG) Up to 76.02% (LP)
- Weight: 210 lbs. (95 kg).
- Viewing Area: Tempered Glass - 52-3/4" W x 13-3/4" T

**Heating capacity will vary with floor plan, insulation, and outside temperature*

ProBuilder™ 54 Linear

Standard Features MV Models

No power required to install and operate.

- Millivolt Continuous Pilot with Piezo Igniter
- No Power Required - Batteries are required with optional remote. 110 V power is required with optional Fan or Accent Light.
- ON/OFF Wall Switch
- Easy Access Controls

Standard Features GSB Models

Features an economical electronic ignition system.

- Continuous Pilot or Basic GreenSmart® Ignition Modes
- 110 V Power Required, Built-in Automatic Battery Backup
- ON/OFF Wall Switch
- Easy Access Controls

Standard Features Deluxe Models

Includes a combination of incredible exclusive features.

- Continuous Pilot or GreenSmart® Ignition Modes
- Under-lit Accent Lighting
- 110 V Power Required, Built-in Automatic Battery Backup
- 180 CFM Variable Speed Convection Fan
- All Functions Are Controlled From the GreenSmart® Remote

Optional Accessories for MV & GSB Models

Basic GreenSmart® Wireless Thermostat Remote Control

- Manual Setting - ON/OFF controls.
- Thermostat Setting - Fireplace turns ON/OFF to maintain your desired home/room temperature.

Convection Fan

Variable speed 180 CFM* fan helps increase the natural convection of heated air into the room as it circulates around the firebox and glass frame.

The fan speed is manually controlled by a rheostat dial.

*Cubic Feet Per Minute


Wired Wall Timer

The wired wall timer allows you to set the shut off time of your fireplace in 30 minute increments with a two hour maximum time limit.

Accent Lights

Accent Lights are an optional feature in the MV and GSB fireplaces. This feature adds a warm glow below the glass floor media and can be used when the fire is on or off.

Standard GreenSmart® Multi-Function Wireless Thermostat Remote Control

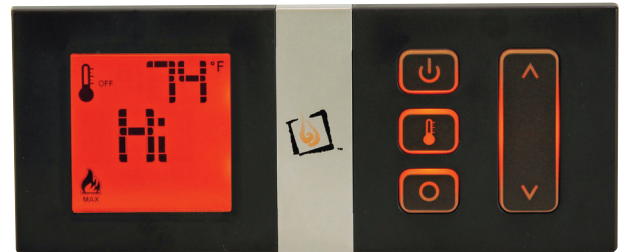

- Manual
- Thermostat and Smart Thermostat Modes
- Flame Adjustment (6 Levels)
- Change Between GreenSmart® and Continuous Pilot Modes
- Fan Operation
- Underlit Accent Light

Optional Accessories for All ProBuilder Linear Models

Fyre-Art™

These decorative options allow you to personalize your fireplace with a little added style.



Tumbled Stone



Driftwood & Stones



Driftwood Logs



Traditional Logs



Birch Logs


Power Exhaust Vent

The Power Exhaust Vent allows you to install these gas fireplaces virtually any-where in your home, by accommodating even the most difficult venting restrictions. This option requires electricity to operate your fireplace.

CoolSmart TV Wall™

Our optional CoolSmart TV Wall™ Kit allows you to safely install a television above your gas fireplace (either recessed or mounted), without requiring a mantel.

Firebacks



LedgeStone



High Gloss Black Glass

FIREPLACE
XTRORDINAIR

Manufactured in
Mukilteo, WA
By Travis Industries

© 08/2021