

BERKSHIRE™ DELUXE GAS BURNING STOVE




MEDIUM BAY WINDOW CAST IRON STOVE


Think of the Berkshire™ as a functional work of art. Its classic balance, three-side bay window fireview and symmetry resembles a piece of fine furniture. This solidly built stove features decorative cast iron on the outside with a heavy-gauge unibody steel firebox for added durability on the inside. Design details include a large glass area, and delicate cast iron moldings that are typical of early American architectural style.

Comfort Control™ that allows you to turn off the rear burner for less heat to provide for year-round enjoyment of the fire. Choice of pilot ignition modes - Choose GreenSmart™ Pilot setting to save money or Continuous Pilot during winter months where a heated chimney is needed to maintain the draft to ensure proper operation.


The 130 CFM fan increases efficiency by enhancing the transfer of convective heat in your home. The accent light adds a glowing back-light behind the logs and against the beautiful standard cast iron fireback. Whether your fire is on or off, the light makes your Berkshire™ a focal point of the room. This adjustable light is perfect as a night light or as a soft indirect light for the room.



NEW IRON PAINT FINISH



**HAND-RUBBED
BRONZE PATINA**



OXFORD BROWN ENAMEL

SPECIFICATIONS


- Maximum BTU Input per Hour 31,000 (NG & LP)
- Minimum BTU Input per Hour 10,700 (NG), 12,600 (LP)
- Heating Capacity* Up to 1,500 sq. ft.
- Canadian P.4.1 Efficiency Up to 70.82% NG
Up to 71.56% LP
- Steady State Efficiency (High) Up to 78.13% (NG)
Up to 79.96% (LP)
- Weight 215 Lbs (97 Kg)
- Glass Viewing Area: 357 sq. in.
Front: 12" H x 15-1/4" W
Side: 10-3/4" H x 7-1/2" W

*Heating Capacity can be affected by negative pressure in the home and by prevailing atmospheric conditions. Contact local building or fire officials about restrictions and installation requirements in your area.

OPTIONS



Lopi gas stoves come in your choice of three finishes:

- NEW IRON - A soft charcoal paint
- HAND-RUBBED BRONZE PATINA - A rich, warm metallic finish
- OXFORD BROWN ENAMEL - A beautiful translucent brown enamel

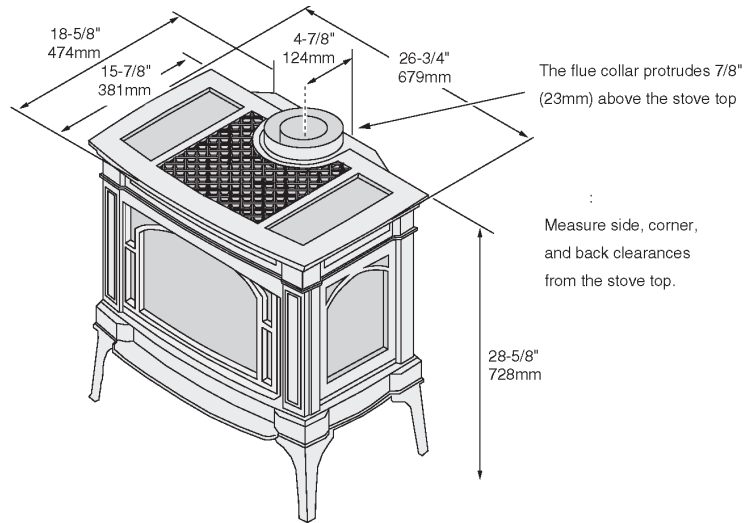

CLEARANCES TO COMBUSTIBLES

All measurements are to be taken from the stove top to combustible walls.




- A - Stove to Sidewall 10" (254mm)
- B - Stove to Backwall 5" (127mm)
- C - Stove to Corner 5" (127mm)

For straight wall installations the vent is centered 7-1/8" from backwall.
For corner installations the vent is centered 15-3/4" from the wall.

LOCATION OPTIONS WITH DIRECT VENT SYSTEM

Direct Venting System provides for horizontal or vertical venting through the outside wall or ceiling, allowing you to install your stove virtually anywhere in the room. Horizontal venting must rise at least 2' (NG) and 3' (LP) above stove top before elbowing.



You can install your stove in any of these configurations:


- A - Cross Corner
- B - Flat with Wall/Alcove
- C - Flat on Wall Corner
- D - Flat on Wall

Where would you like the stove to go in your home?

HEARTH PAD:

A non-combustible hearth pad is required when the stove is installed directly on carpeting, vinyl or combustible flooring other than wood.

No hearth pad is required if the stove is installed on non-combustible flooring (tile, stone, brick) or if installed on a wood or wood laminate floor.



Manufactured in Mukilteo, WA
By Travis Industries
© 08/2021