

EVERGREEN™ NEXGEN-FYRE™ WOOD BURNING STOVE




**2020 EPA
CERTIFIED**

CONTEMPORARY WOOD HEATER

The mid-sized Evergreen NexGen-Fyre™ Wood Stove hits the mark on performance, function and design. This sleek stove features gentle curved lines and complements any home's décor while artfully presenting heavy gauge steel, unibody construction and a cast iron door with a large, self-cleaning ceramic glass viewing area. The Evergreen's standard bypass damper gives you full control over the flow of smoke inside this stove, eliminating smoky startups and reloads.

The Evergreen features our revolutionary GreenStart™ option for the modern wood burner; just load your wood and push a button! We've completely eliminated slow, cracked open door startups and laboring over fickle newspaper.

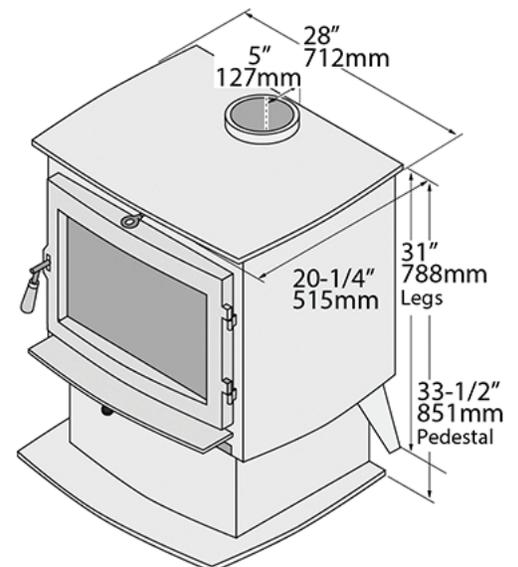

EVERGREEN™ NEXGEN-FYRE™ STOVE

NEXGEN-FYRE™

NexGen-Fyre™ takes our non-catalytic wood burning technology to the next level! With NexGen-Fyre™, primary and secondary combustion are harnessed to create the ultimate blended combustion system that produces beautiful, balanced fires with double the BTU range, up to 50% greater heat output, and longer burn times than any other non-catalytic technology.

SPECIFICATIONS

Emissions:	1.5 Grams Per Hour
Heating Capacity:*	Up to 2,000 Square Feet
EPA Tested BTUs:	12,772 to 70,720
"Real World BTUs":	<i>EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your insert to maintain your desired comfort level. By the simple process of loading your fireplace insert with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.</i>
Construction:	5/16" to 3/16" Steel Plate
Efficiency:*	Up to 77.1% HHV
Glass Area:	183 sq. in (16-7/8" W x 10-7/8" T)

* Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.



**As tested using B-415.1 using Cord Wood. HHV = High Heat Value

Maximum Burn Time:	Up to 10 Hours
Firebox Size:	2.2 Cubic Feet
Maximum Log Size:	20-1/2"
Bypass Damper:	Yes
Weight:	455 Pounds

OPTIONS

- 400 CFM Convection Fan
- Outside Air Kit
- **GREEN START™** Igniter

CLEARANCES & HEARTH PROTECTION

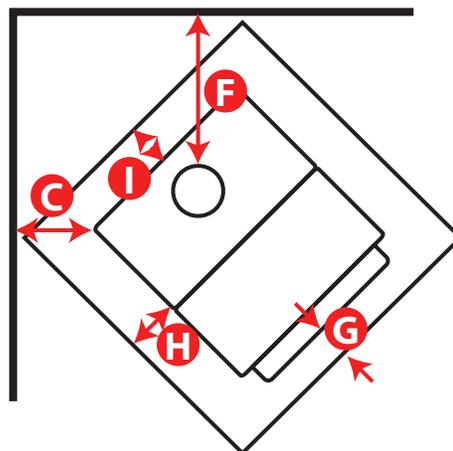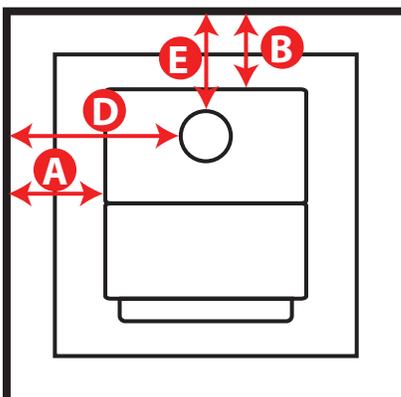

	Single Wall Connector	Double Wall Connector
A	12"	11"
B	17"	9"
C	8"	4"
D	22-1/2"	21"
E	19"	10-1/2"
F	17-1/2"	13-1/2"
	USA	Canada
G	16"	18"
H	6"	8"
I	6"	8"



Manufactured in
Mukilteo, WA
By Travis Industries
© 08/2021